Engineering data (WIN 794)		
DC bus voltage	560	V DC
Nominal AC voltage	380	V AC (rms)
Rated voltage	297	V AC (rms)
Rated power	3.7	kW
Rated speed	2000	rpm
Rated torque	17.50	Nm
Rated current	8.42	A (rms)
Peak torque	60	Nm
Peak current	28.3	A (rms)
Stall torque	20	Nm
Stall current	8.3	A (rms)
No load speed	2600	rpm
EMF constant ±10%	146	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	2.41	Nm / A (rms)
Torque constant ±10% @ rated load	2.08	Nm / A (rms)
Number of poles	10	
Electrical time constant	8.92	ms
Winding terminal resistance	1.39	Ω
Rotary field terminal inductance	12.4	mH


Customs info	
HS Code	85015220

Mechanical data (setting 48)		
Max mechanical speed	9000	rpm
Mech. time constant	0.62	ms
Thermal time constant	65	min
Rotor inertia	15.1	kgcm²
Protection	IP64	
Color	RAL 9005	
Cooling	Ventilation 230V/50Hz	
Motor-only mass	11.2	kg
Max. axial force 20kh	142	N
Max. radial force 20kh*	746	N
Max. axial force 100kh	83	N
Max. radial force 100kh*	436	N

** Defined for point of action at ½ output shaft length*


Sensors	
Temperature	PT1000 {PT1000}
Feedback	EKS36 (HDSL) single-turn, 17 bits

Torque / speed curve

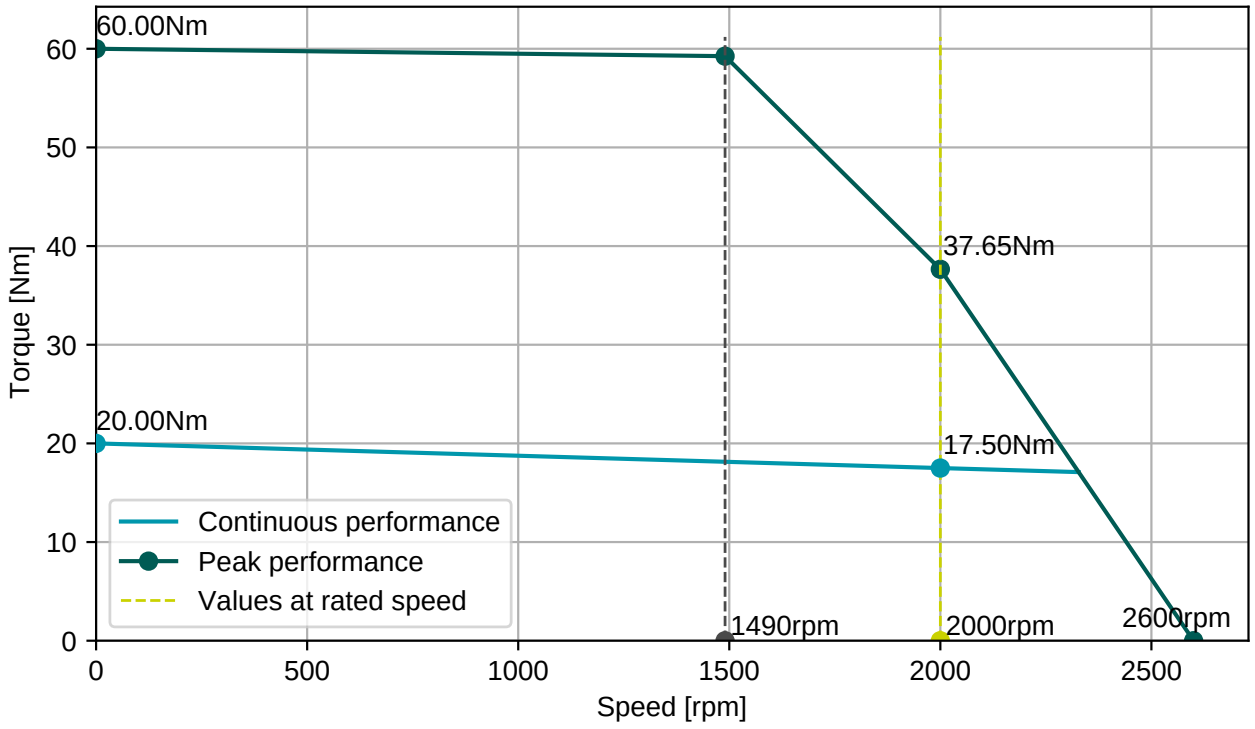


BGC110N00001216000

M23, 8 poles, rotary

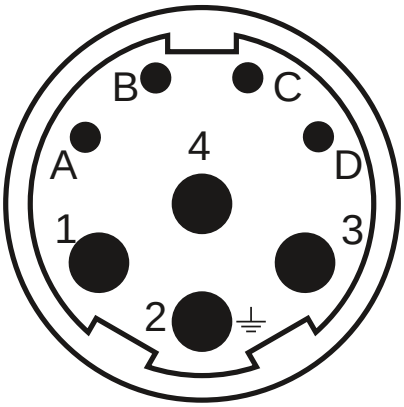

Connector 1 (283)	
1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

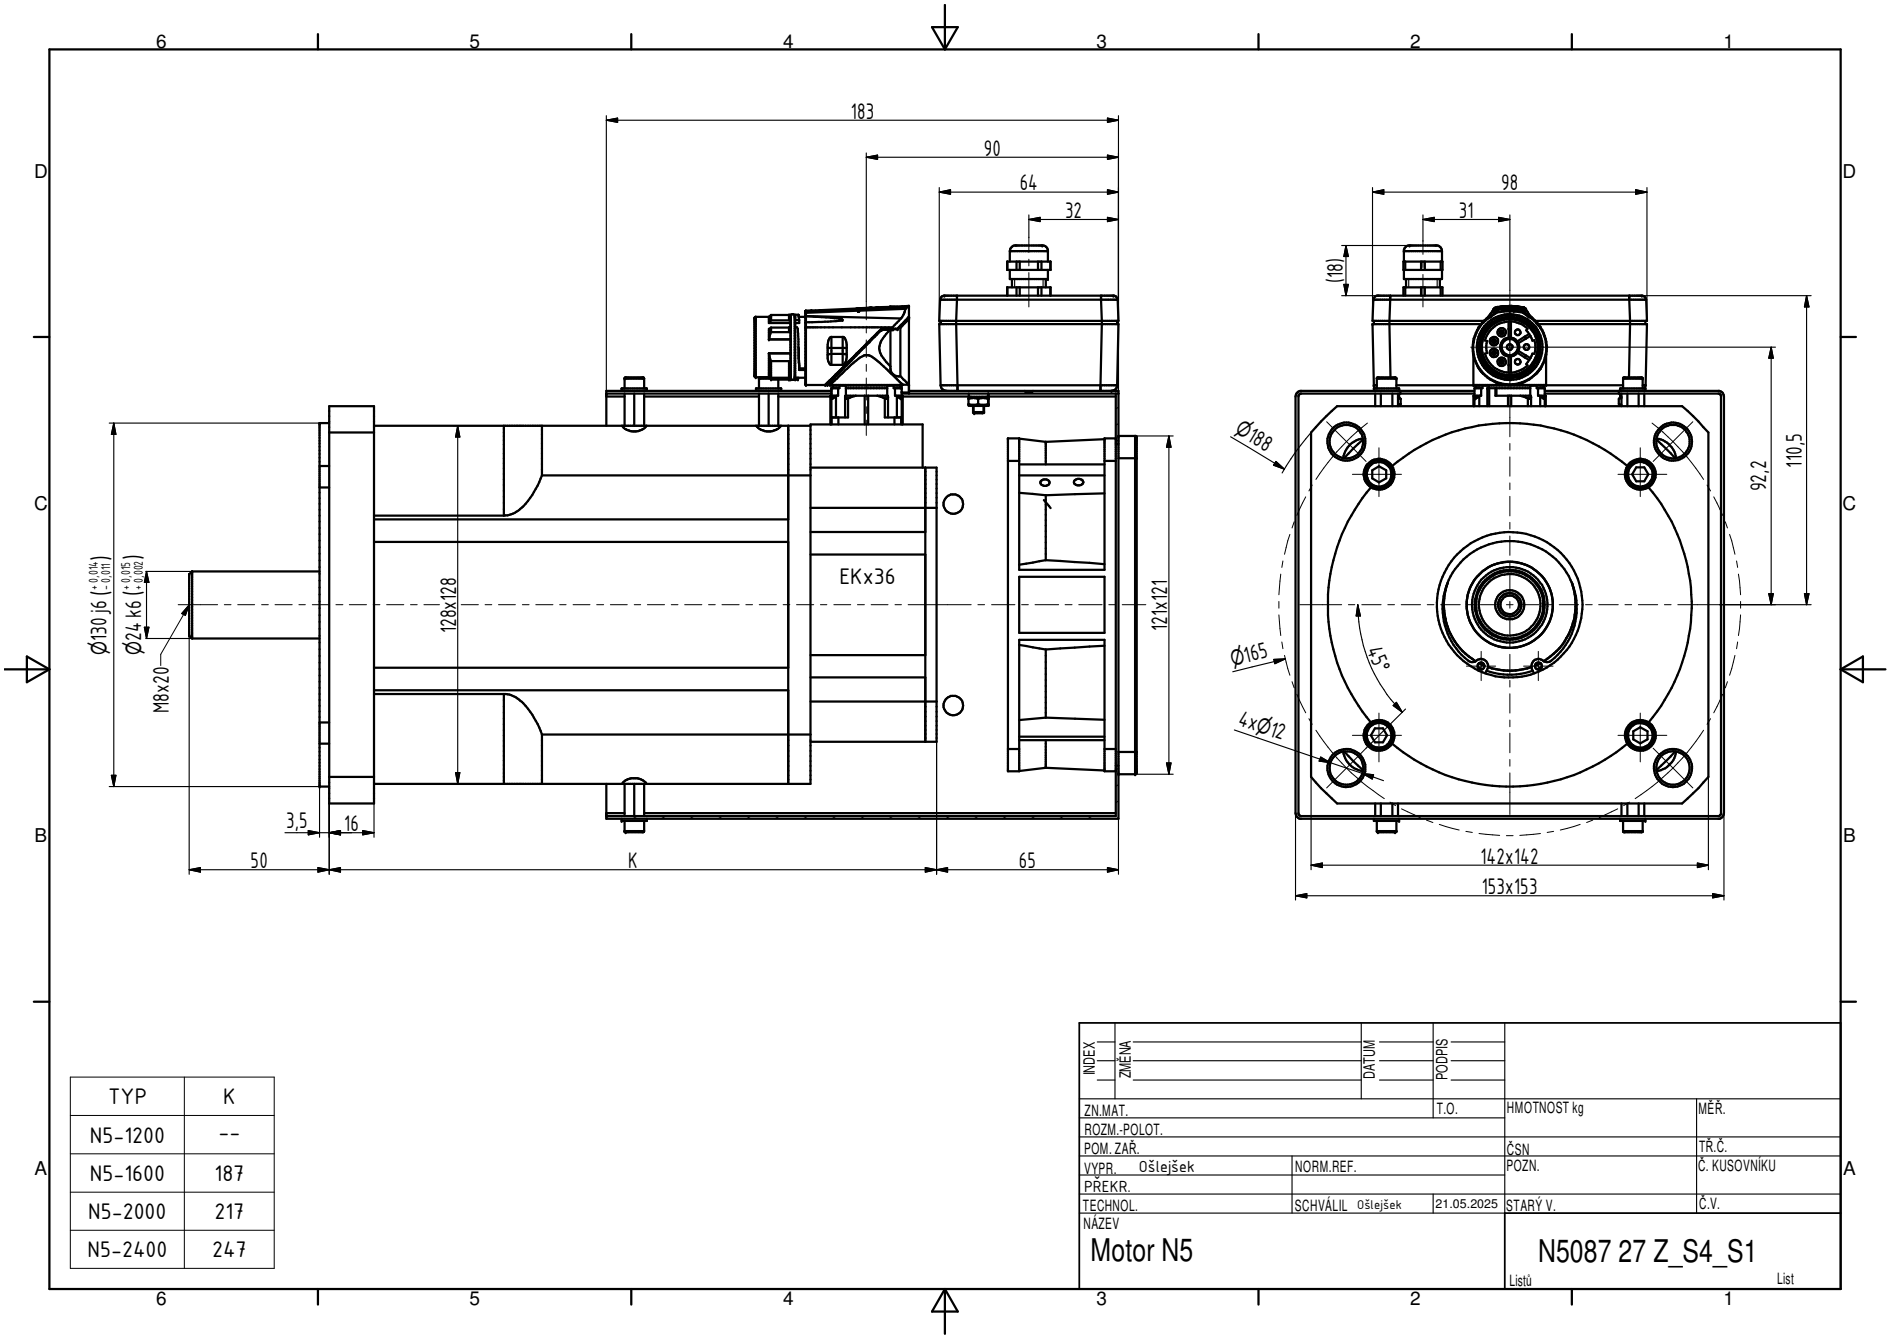

TYP	K
N5-1200	--
N5-1600	187
N5-2000	217
N5-2400	247

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.		T.O.	HMOTNOST kg	MĚŘ.	
ROZM.-POLOT.					
POM. ZAŘ.			ČSN	TŘ.Č.	
VYPR. Ošlejšek	NORM.REF.		POZN.	Č. KUSOVNÍKU	
PŘEKR.					
TECHNOL.	SCHVÁLIL Ošlejšek	21.05.2025	STARÝ V.	Č.V.	
NÁZEV					
Motor N5			N5087 27 Z_S4_S1		
			Listů	List	