Engineering motordata (WIN 1015)		
DC bus voltage	24	V DC
Nominal AC voltage	17	V AC (rms)
Rated voltage	15	V AC (rms)
Rated power	503	W
Rated speed	3000	rpm
Rated torque	1.60	Nm
Rated current	24.21	A (rms)
Peak torque	5.2	Nm
Peak current	110.5	A (rms)
Stall torque	1.9	Nm
Stall current	27.5	A (rms)
No load speed	4060	rpm
EMF constant ±10%	4.2	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.07	Nm / A (rms)
Torque constant ±10% @ rated load	0.07	Nm / A (rms)
Number of poles	10	
Electrical time constant	2.38	ms
Winding terminal resistance	0.042	Ω
Rotary field terminal inductance	0.1	mH

Customs info	
HS Code	85015100

Mechanical motor data (setting 30)		
Max mechanical speed	12000	rpm
Mech. time constant	1.05	ms
Thermal time constant	30	min
Rotor inertia	0.7	kgcm²
Protection	IP67	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	2.3	kg

Sensors	
Temperature	PT1000 {PT1000}

Brake		
Braking torque	2.00	Nm
Voltage	24	V DC
Power @20°C	15.0	W
Current @20°C	0.63	A
Inertia	0.08	kgcm²
Mass	0.25	kg

Note
Preliminary

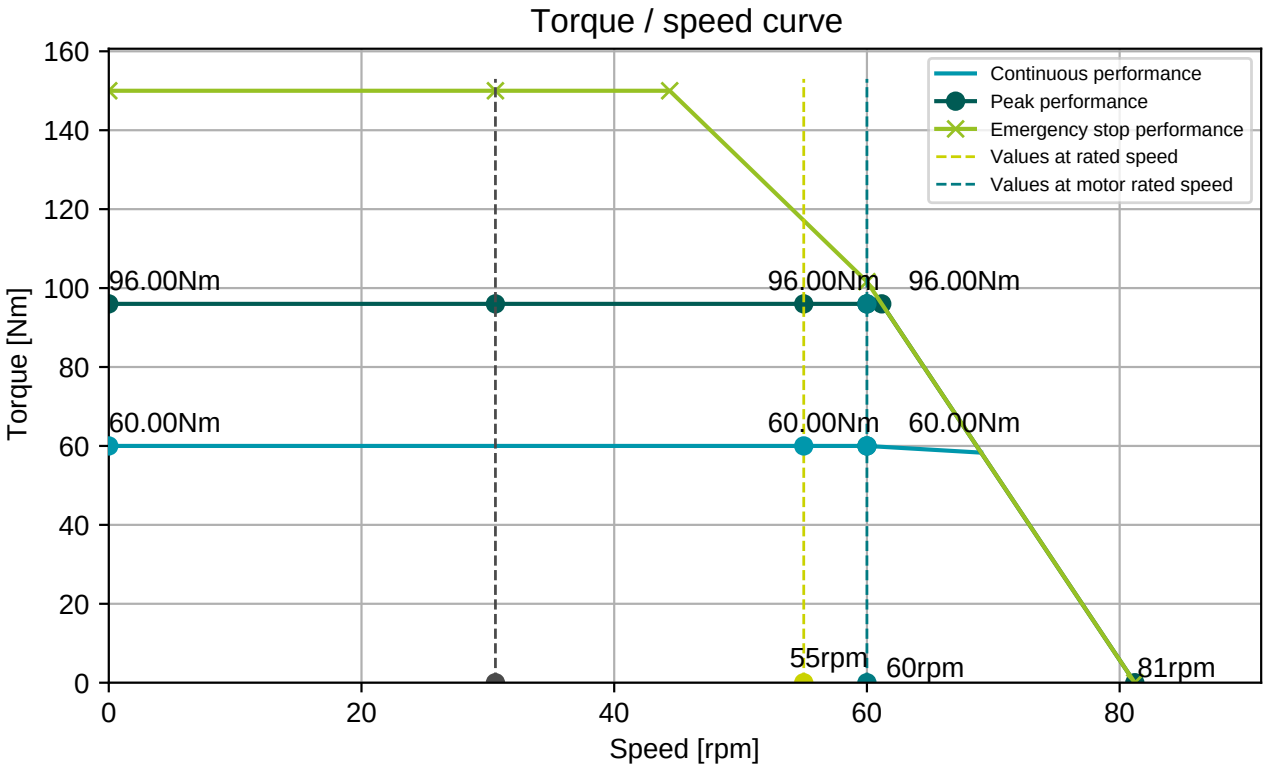
Gearbox engineering data		
Gear ratio	50	
Efficiency*	75	%
Torsional stiffness	5.8	Nm/arcmin
Number of stages	2	
Rated output torque	60	Nm
Max output torque	96	Nm
Emergency output torque	150	Nm
Rated input speed	2750	rpm
Max input speed	16000	rpm
Operating temperature	<-25; 90>	°C
Max. backlash	< 3	arcmin
Service life	20000	h

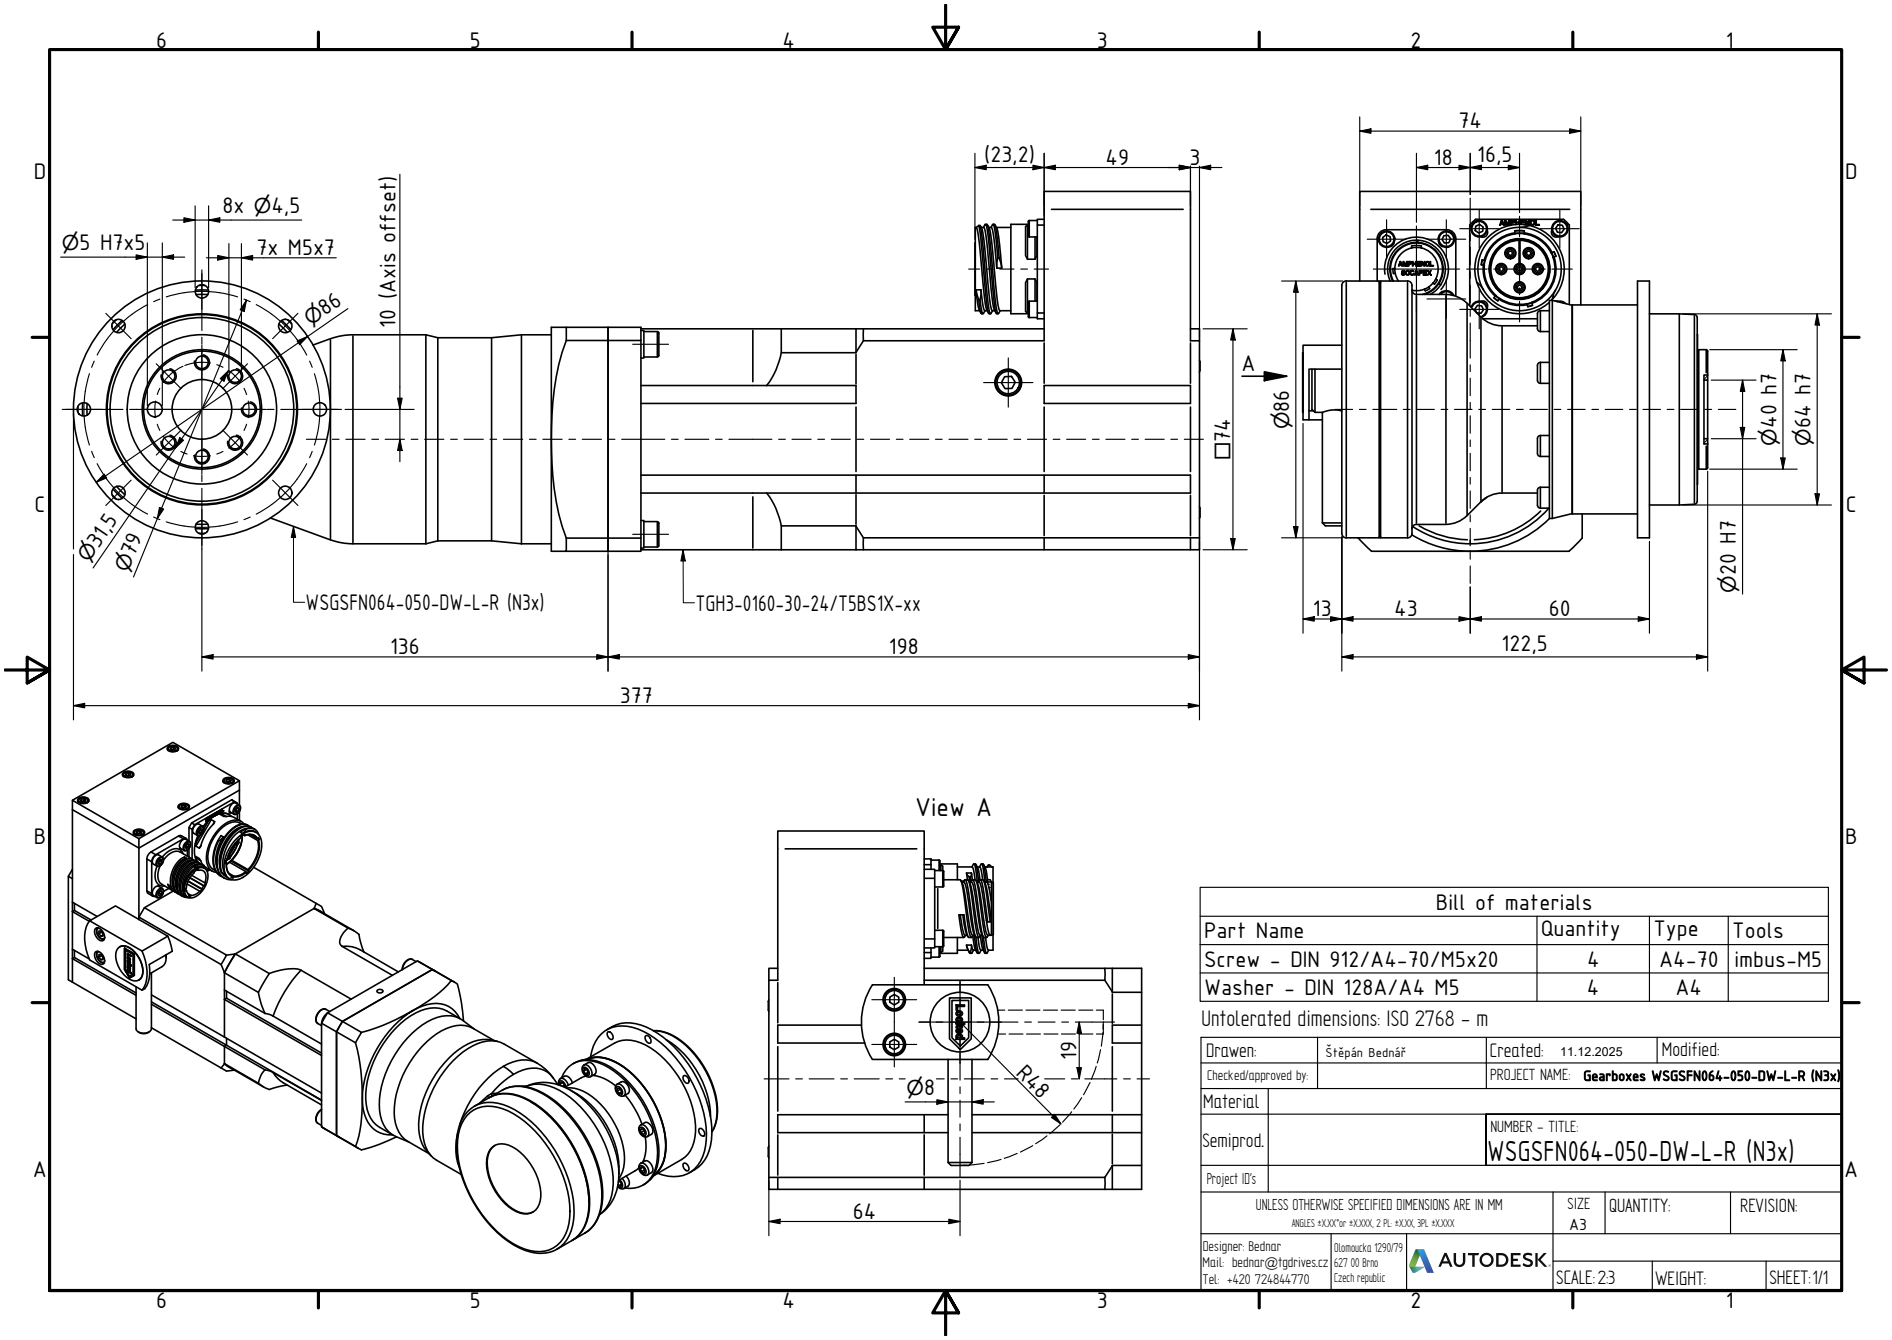
** at rated speed & torque*

Lubrication	
Type	Standard
Lubricant	Oil (lifetime lubrication)

Gearbox mechanical data		
Radial force for 20'000h	2150	N
Axial force for 20'000h	4300	N
Output shaft design	Flange with dowel hole	
Mass	3.9	kg
Input inertia	0.497	kgcm²
Protection	IP65	

Actuator data		
Rated speed	55	rpm
Rated torque	60.00	Nm
Peak torque	96.00	Nm
Emergency stop torque	150.00	Nm
EMF constant ±10%	210.0	V AC (rms) / 1000rpm
Torque constant ±10% @ rated load	2.48	Nm / A (rms)
Total mass	6.45	kg
Output inertia	2992.5	kgcm²


Torque / speed curve
Continuous performance
Peak performance
Emergency stop performance
Values at rated speed
Values at motor rated speed
96.00Nm
96.00Nm
96.00Nm
60.00Nm
60.00Nm
60.00Nm
55rpm
60rpm
81rpm
Torque [Nm]
Speed [rpm]
0
20
40
60
80
100
120
140
160

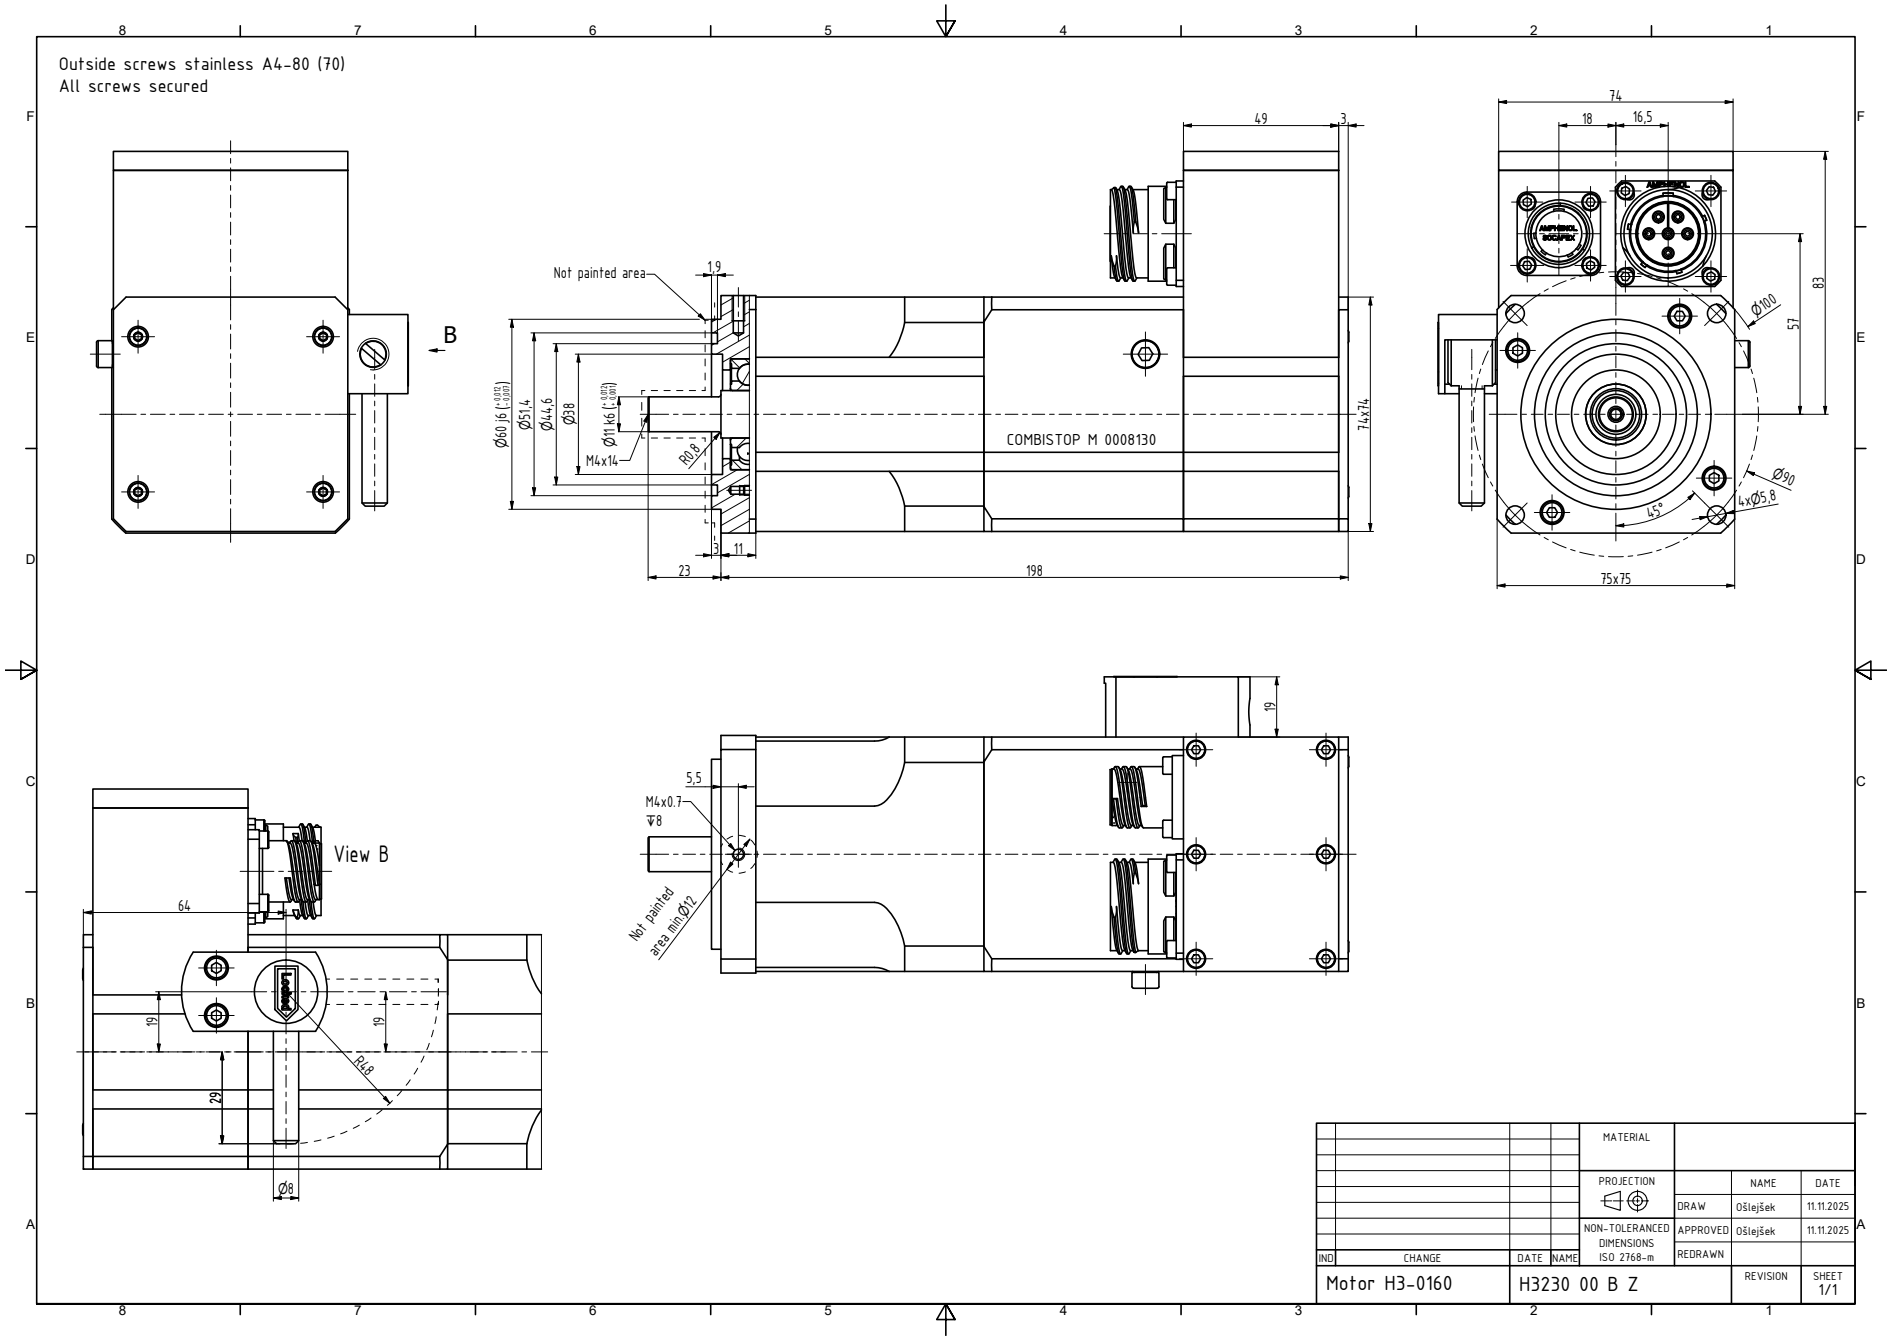


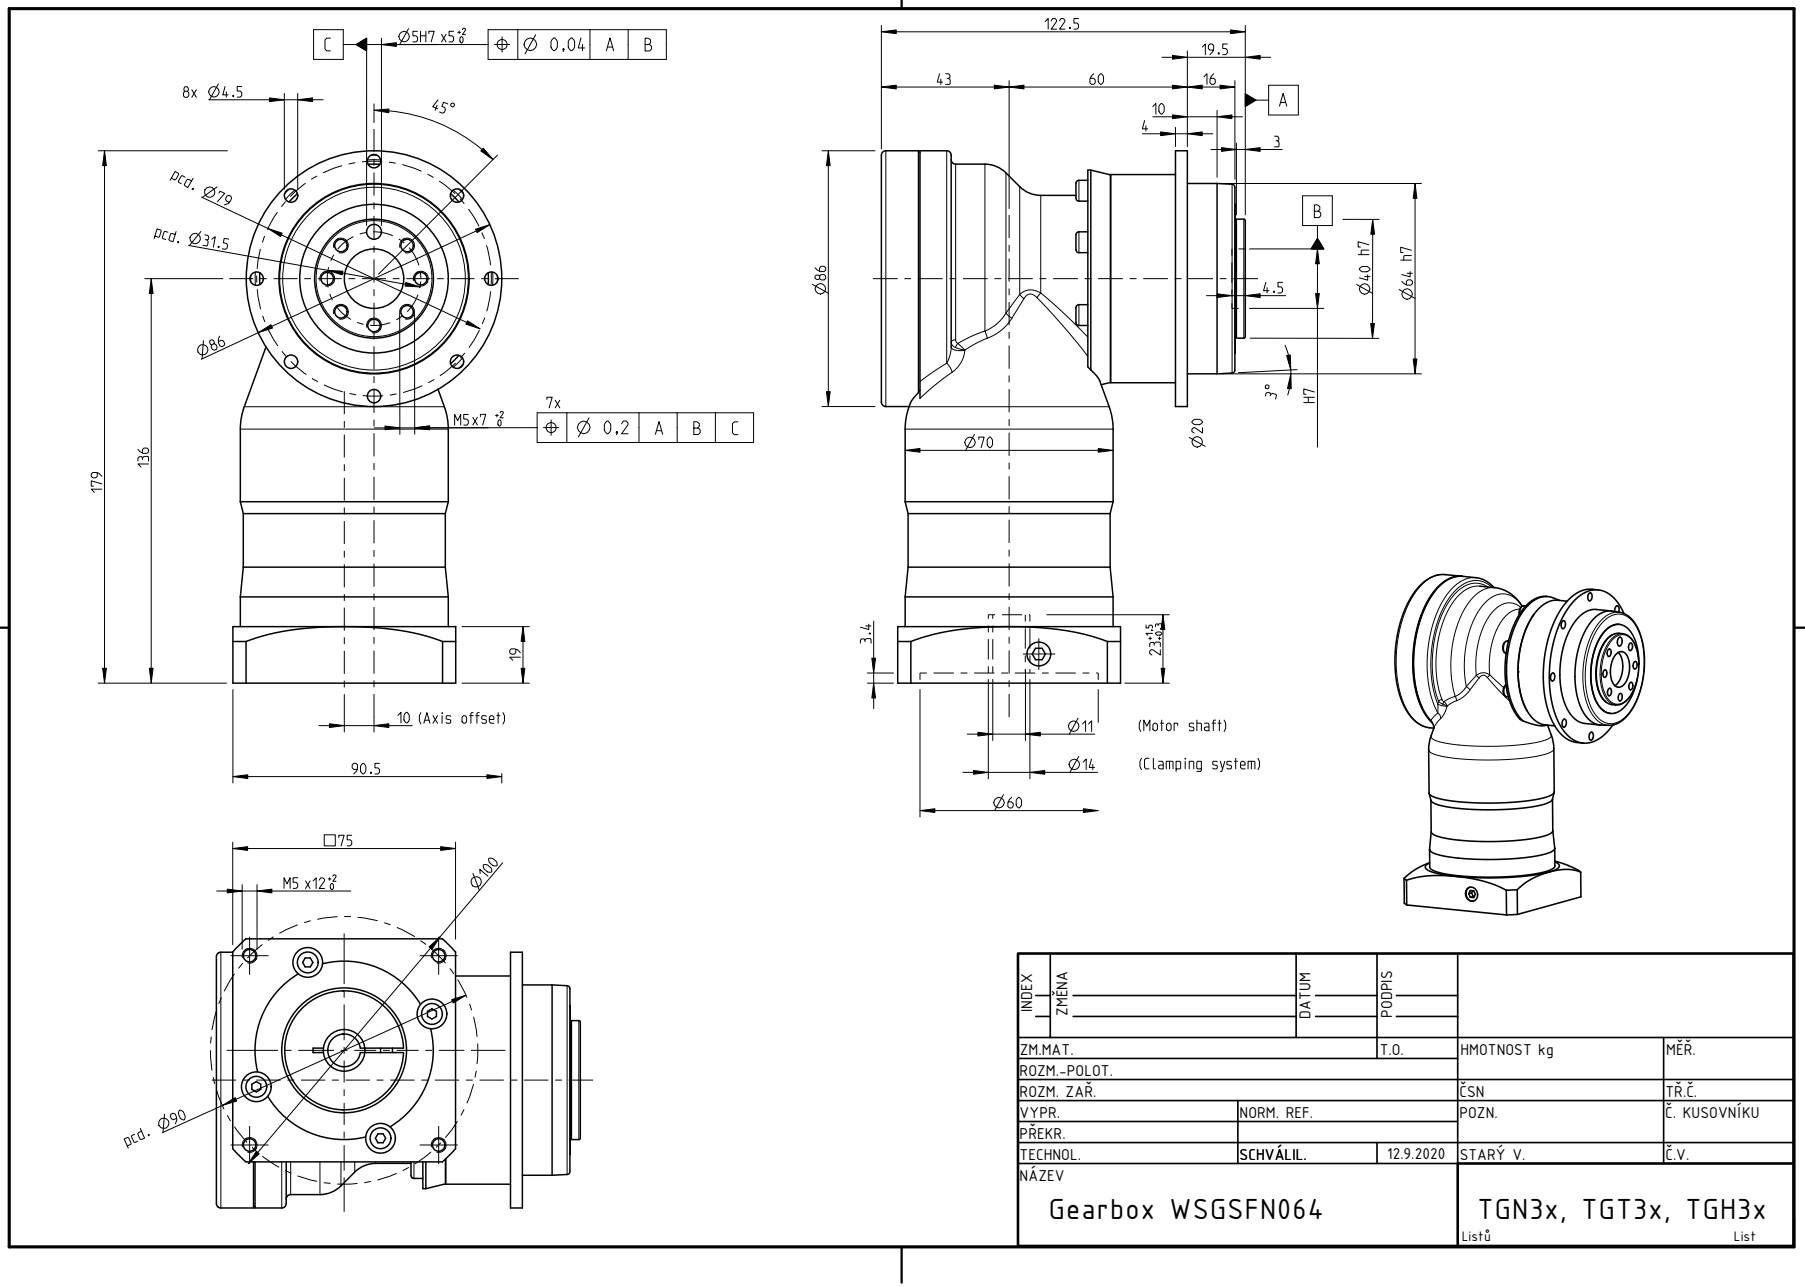
Bill of materials			
Part Name	Quantity	Type	Tools
Screw - DIN 912/A4-70/M5x20	4	A4-70	imbus-M5
Washer - DIN 128A/A4 M5	4	A4	

Untolerated dimensions: ISO 2768 - m

Drawen:	Štěpán Bednář	Created: 11.12.2025	Modified:
Checked/approved by:		PROJECT NAME: **Gearboxes WSGSFN064-050-DW-L-R (N3x)**	
Material			
Semiprod.		NUMBER - TITLE: WSGSFN064-050-DW-L-R (N3x)	
Project ID's			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM ANGLES ±XXX°or ±XXXX, 2 PL ±XXX, 3PL ±XXXX	SIZE A3	QUANTITY:	REVISION:
Designer: Bednar Mail: bednar@tgdrives.cz Tel: +420 724844770	Olomoucka 1290/79 627 00 Brno Czech republic	AUTODESK	SCALE: 2:3 / WEIGHT: / SHEET: 1/1


Outside screws stainless A4-80 (70)
All screws secured
B
Not painted area
1,9
Ø60 j6 (-0,013 -0,032)
Ø51,4
Ø44,6
Ø38
Ø11 K6 (+0,002 -0,011)
M4x14
R0,8
49
3
COMBISTOP M 0008130
74x74
3
11
23
198
74
18
16,5
Ø100
83
57
Ø90
4xØ5,8
45°
75x75
19
5,5
M4x0.7
↧8
Not painted area minØ12
View B
64
19
19
29
R4,8
Ø8
MATERIAL
PROJECTION
NON-TOLERANCED DIMENSIONS ISO 2768-m
NAME
DATE
DRAW
Ošlejšek
11.11.2025
APPROVED
Ošlejšek
11.11.2025
REDRAWN
IND
CHANGE
DATE
NAME
Motor H3-0160
H3230 00 B Z
REVISION
SHEET
1/1


C
Ø5H7 x5 +2
Ø 0,04 A B
8x Ø4.5
45°
pcd. Ø79
pcd. Ø31.5
Ø86
M5x7 +2
7x
Ø 0,2 A B C
179
136
19
10 (Axis offset)
90.5
122.5
19.5
43
60
16
10
4
3
A
B
Ø86
4.5
Ø40 h7
Ø64 h7
3°
H7
Ø20
Ø70
3.4
23+0.5
Ø11
(Motor shaft)
Ø14
(Clamping system)
Ø60
□75
M5 x12 +2
Ø100
pcd. Ø90
INDEX
ZMĚNA
DATUM
PODPIS
ZM.MAT.
T.O.
HMOTNOST kg
MĚŘ.
ROZM.-POLOT.
ROZM. ZAŘ.
ČSN
TŘ.Č.
VYPR.
NORM. REF.
POZN.
Č. KUSOVNÍKU
PŘEKR.
TECHNOL.
SCHVÁLIL.
12.9.2020
STARÝ V.
Č.V.
NÁZEV
Gearbox WSGSFN064
TGN3x, TGT3x, TGH3x
Listů
List