Engineering data (WIN 706)		
DC bus voltage	320	V DC
Nominal AC voltage	220	V AC (rms)
Rated voltage	156	V AC (rms)
Rated power	942	W
Rated speed	3000	rpm
Rated torque	3.00	Nm
Rated current	4.31	A (rms)
Peak torque	10.5	Nm
Peak current	19.4	A (rms)
Stall torque	3.5	Nm
Stall current	4.23	A (rms)
No load speed	4390	rpm
EMF constant ±10%	50	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.83	Nm / A (rms)
Torque constant ±10% @ rated load	0.70	Nm / A (rms)
Number of poles	10	
Electrical time constant	2.88	ms
Winding terminal resistance	2.81	Ω
Rotary field terminal inductance	8.1	mH

Customs info	
HS Code	85015220


Mechanical data (setting 5)		
Max mechanical speed	12000	rpm
Mech. time constant	0.74	ms
Thermal time constant	27	min
Rotor inertia	1.04	kgcm²
Protection	IP64	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	2.9	kg
Max. axial force 20kh	68	N
Max. radial force 20kh*	356	N
Max. axial force 100kh	40	N
Max. radial force 100kh*	208	N

** Defined for point of action at ½ output shaft length*

Sensors	
Temperature	PT1000 {PT1000}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

Note
Cables length 1m

Torque / speed curve

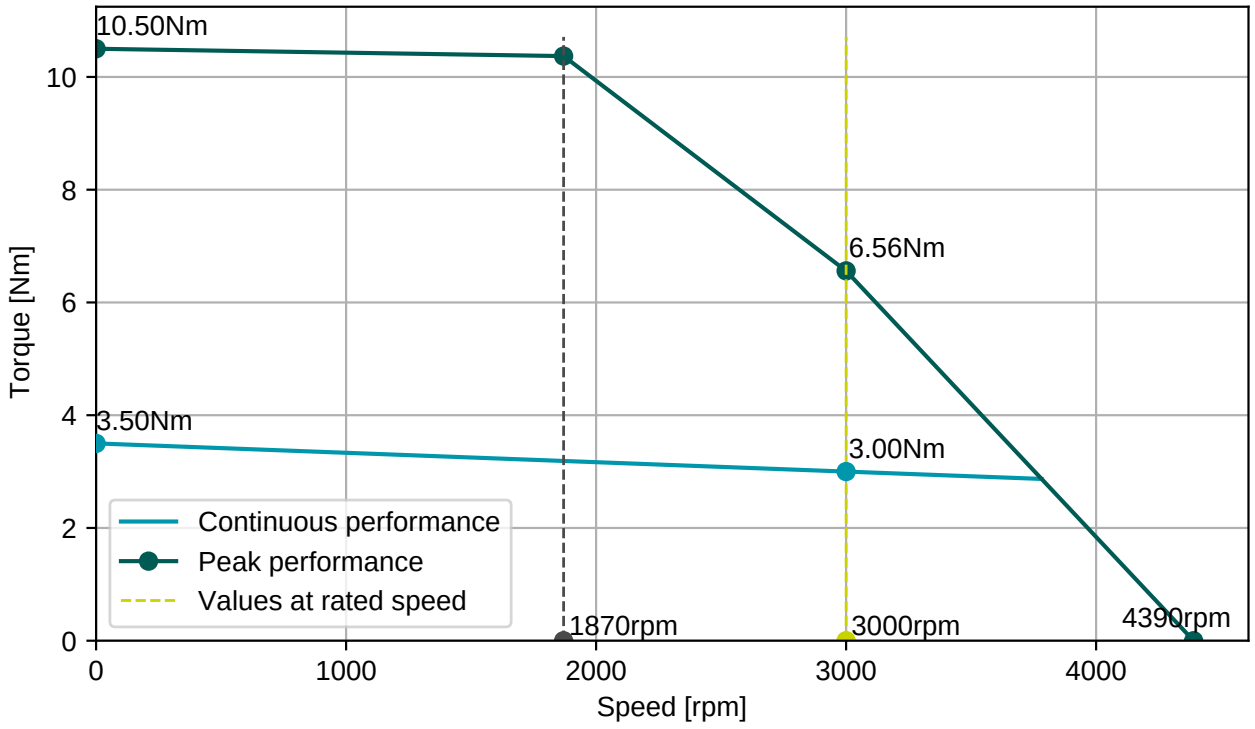


Cable SF4x1,5, D=9,6±0,4mm

Connector 1 (21)	
1	U
2	V
3	W
PE	PE
5	Brake+
6	Brake-

Numbers printed on the cables

Cable R4x2x0,25, D=6,8±0,4mm

Connector 2 (22)	
white	R1
brown	R2
grey	S1
green	S2
pink	S3
yellow	S4
red	Therm+
blue	Therm-

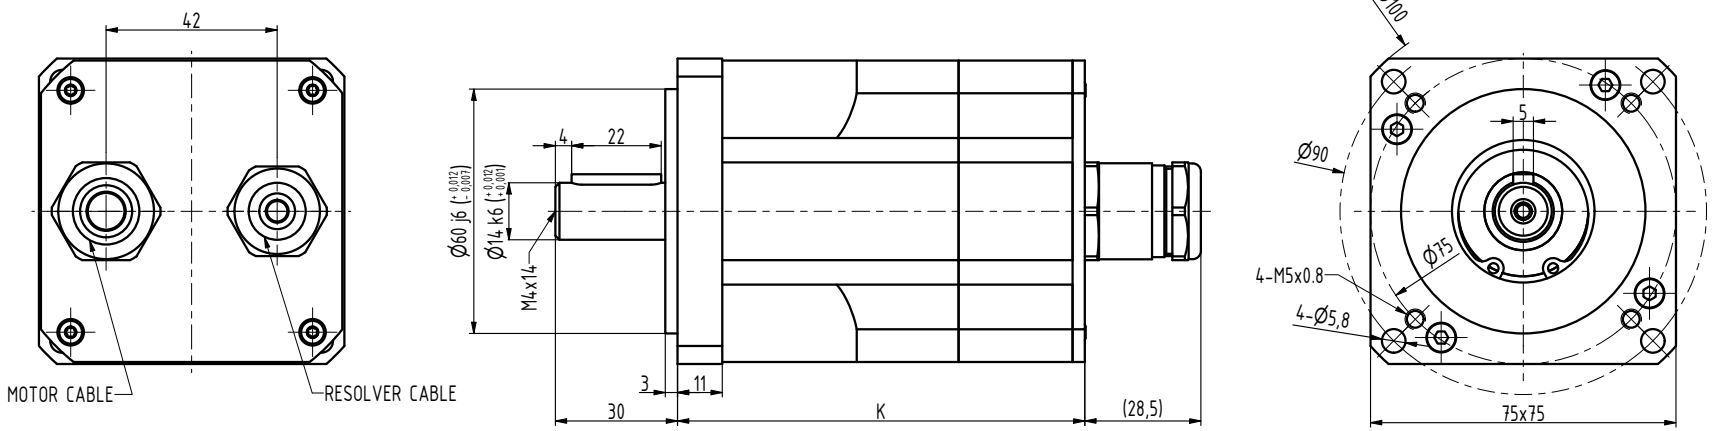

TYP	K
N3-0115	82
N3-0205	100
N3-0280	118
N3-0350	136
N3-0420	154
N3-0480	172

				MATERIAL			
				PROJECTION		NAME	DATE
					DRAW	Ošlejšek	13.03.2017
				NON-TOLERANCED DIMENSIONS ISO 2768-m	APPROVED	Ošlejšek	13.03.2017
IND	CHANGE	DATE	NAME		REDRAWN	Ošlejšek	09.01.2026
Motor N3		N3111 16 P Z			REVISION	SHEET 1/1	