

Engineering data (WIN 924)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	278 V AC (rms)
Rated power	2.8 kW
Rated speed	4000 rpm
Rated torque	6.70 Nm
Rated current	7.26 A (rms)
Peak torque	28.8 Nm
Peak current	28.8 A (rms)
Stall torque	9.6 Nm
Stall current	7.7 A (rms)
No load speed	5050 rpm
EMF constant ±10%	75 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	1.24 Nm / A (rms)
Torque constant ±10% @ rated load	0.92 Nm / A (rms)
Number of poles	10
Electrical time constant	5.87 ms
Winding terminal resistance	1.21 Ω
Rotary field terminal inductance	7.1 mH

Customs info

HS Code	85015220
---------	----------

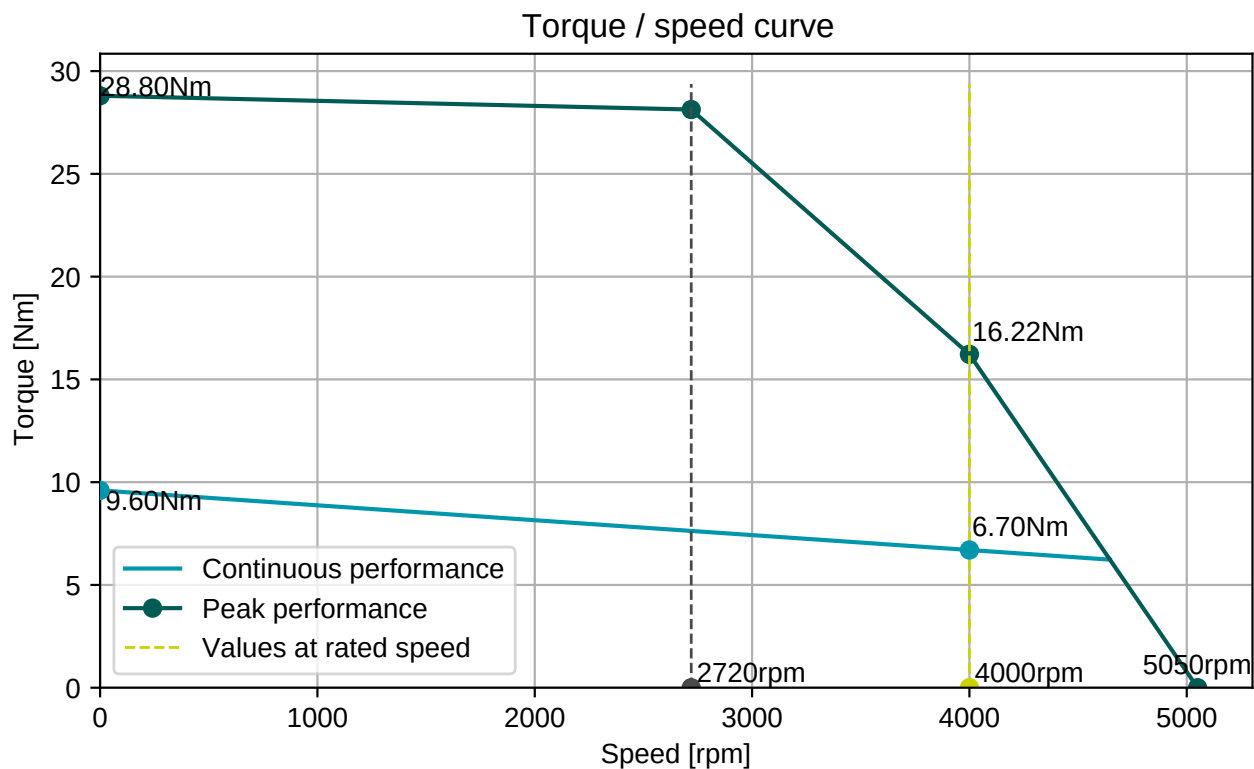
Mechanical data (setting 48)

Max mechanical speed	9000 rpm
Mech. time constant	0.61 ms
Thermal time constant	35 min
Rotor inertia	4.49 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Max. axial force 20kh	119 N
Max. radial force 20kh	626 N*
Max. axial force 100kh	70 N
Max. radial force 100kh	366 N*

* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 17 + 12 bits


BGC110N00001216000

M23, 8 poles, rotary


Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

