

Engineering data (WIN -100089)

DC bus voltage	48 V DC
Nominal AC voltage	33 V AC (rms)
Rated voltage	26 V AC (rms)
Rated power	98 W
Rated speed	1000 rpm
Rated torque	0.94 Nm
Rated current	4.36 A (rms)
Peak torque	2.52 Nm
Peak current	11.44 A (rms)
Stall torque	0.95 Nm
Stall current	4.25 A (rms)
No load speed	2410 rpm
EMF constant ±10%	13.5 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.22 Nm / A (rms)
Torque constant ±10% @ rated load	0.22 Nm / A (rms)
Number of poles	6
Electrical time constant	1.44 ms
Winding terminal resistance	2.38 Ω
Rotary field terminal inductance	3.42 mH

Customs info

HS Code	85015100
---------	----------

Mechanical data (setting 29)

Max mechanical speed	12000 rpm
Mech. time constant	0.91 ms
Thermal time constant	18 min
Rotor inertia	0.11 kgcm ²
Protection	IP65
Color	EPOX3 (RAL 9005)
Cooling	Convection
Motor-only mass	1.3 kg
Max. axial force 20kh	45 N
Max. radial force 20kh	234 N*
Max. axial force 100kh	26 N
Max. radial force 100kh	137 N*

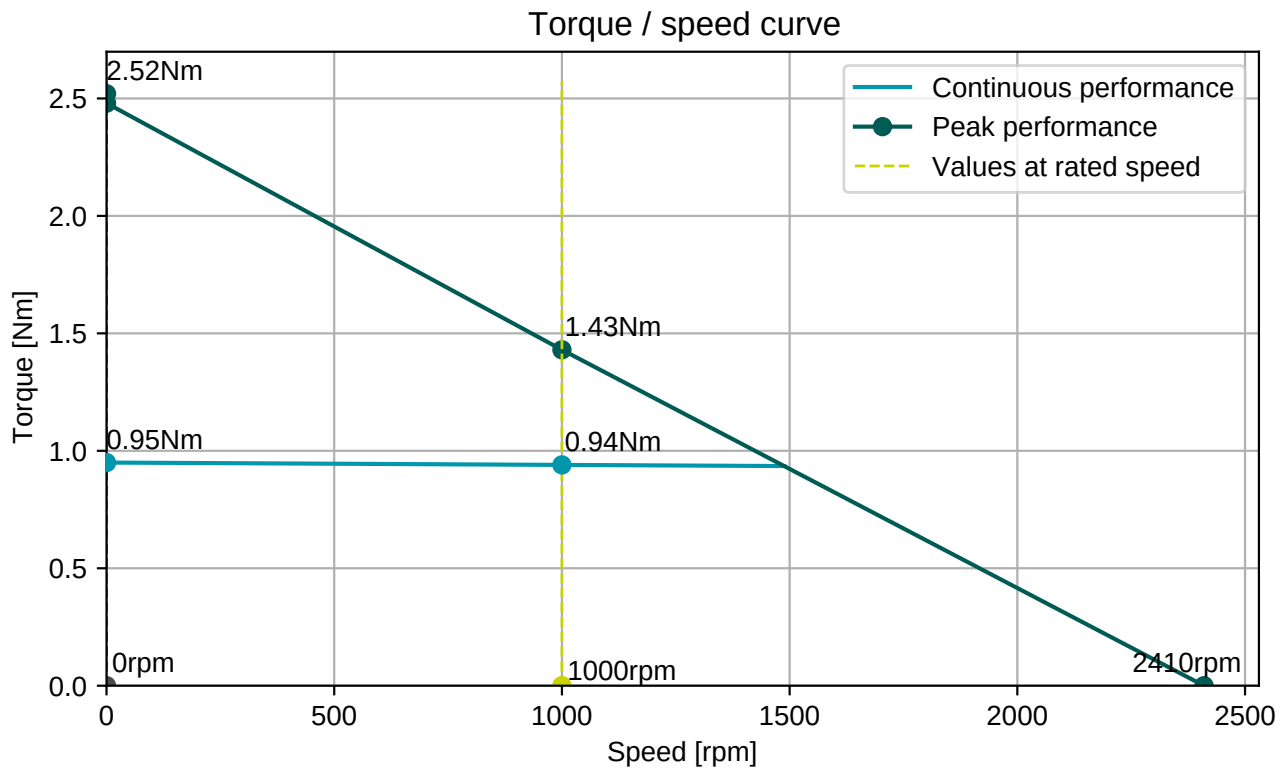
* Defined for point of action at ½ output shaft length

Sensors

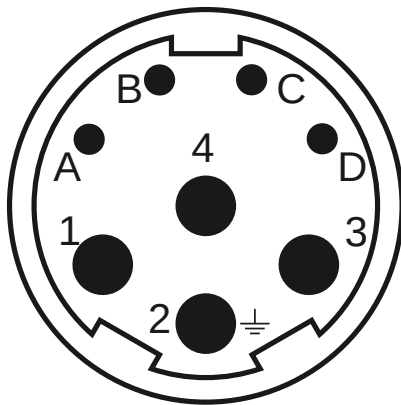
Temperature	PT1000 {PT1000}
Feedback	ELM35 (24+12 bits, BISS-C, multi-turn)

Brake

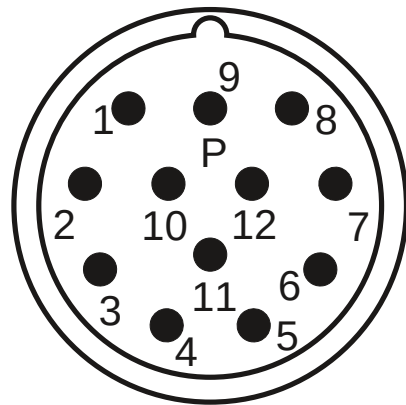
Braking torque	2.00 Nm
Voltage	24 V DC
Power @20°C	11.0 W
Current @20°C	0.46 A
Inertia	0.08 kgcm ²
Mass	0.20 kg


BFC110N00000207000

M23, 8 poles, rectangular


AFC114N00000214000

M23, 12 poles, rectangular


Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (458)

1	Vcc
2	GND
3	DATA
4	DATA-
5	CLOCK
6	CLOCK-
7	Therm+
8	Therm-

