Engineering data (WIN 1586)		
DC bus voltage	320	V DC
Nominal AC voltage	220	V AC (rms)
Rated voltage	149	V AC (rms)
Rated power	336	W
Rated speed	3000	rpm
Rated torque	1.07	Nm
Rated current	1.78	A (rms)
Peak torque	4.48	Nm
Peak current	8.3	A (rms)
Stall torque	1.12	Nm
Stall current	1.81	A (rms)
No load speed	5840	rpm
EMF constant ±10%	37.5	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.62	Nm / A (rms)
Torque constant ±10% @ rated load	0.60	Nm / A (rms)
Number of poles	6	
Electrical time constant	1.57	ms
Winding terminal resistance	13.98	Ω
Rotary field terminal inductance	21.9	mH

Customs info	
HS Code	85015100


Mechanical data (setting 1)		
Max mechanical speed	12000	rpm
Mech. time constant	0.69	ms
Thermal time constant	18	min
Rotor inertia	0.11	kgcm²
Protection	IP64	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	0.9	kg
Max. axial force 20kh	52	N
Max. radial force 20kh*	261	N
Max. axial force 100kh	29	N
Max. radial force 100kh*	150	N

** Defined for point of action at ½ output shaft length*


Sensors	
Temperature	PT1000 {PT1000}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

Note
X: shaft-9x24


Torque / speed curve

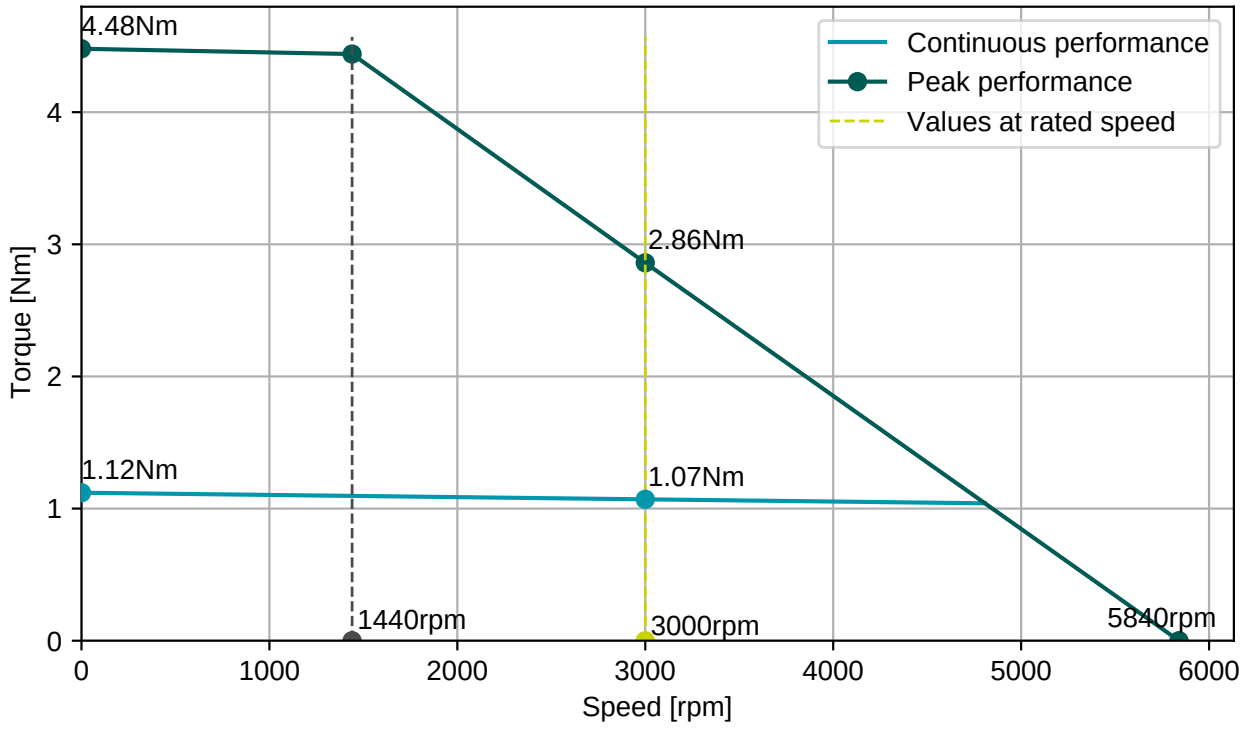

BGC110N00001216000
M23, 8 poles, rotary

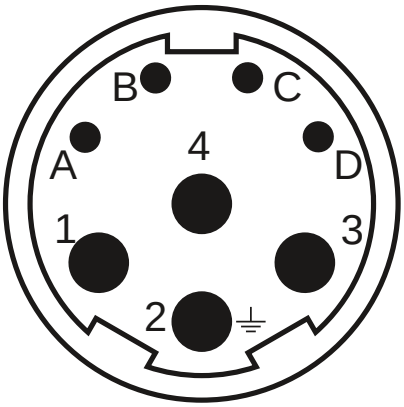



AGC052N00001215000
M23, 12 poles, rotary

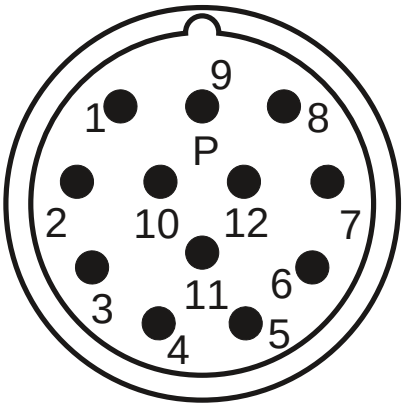

Connector 1 (3)	
1	U
4	V
3	W
2	PE
A	
B	
C	Brake+
D	Brake-

Connector 2 (26)	
1	Therm+
2	Therm-
3	R2
4	R1
5	S2
6	S4
7	S3
8	S1

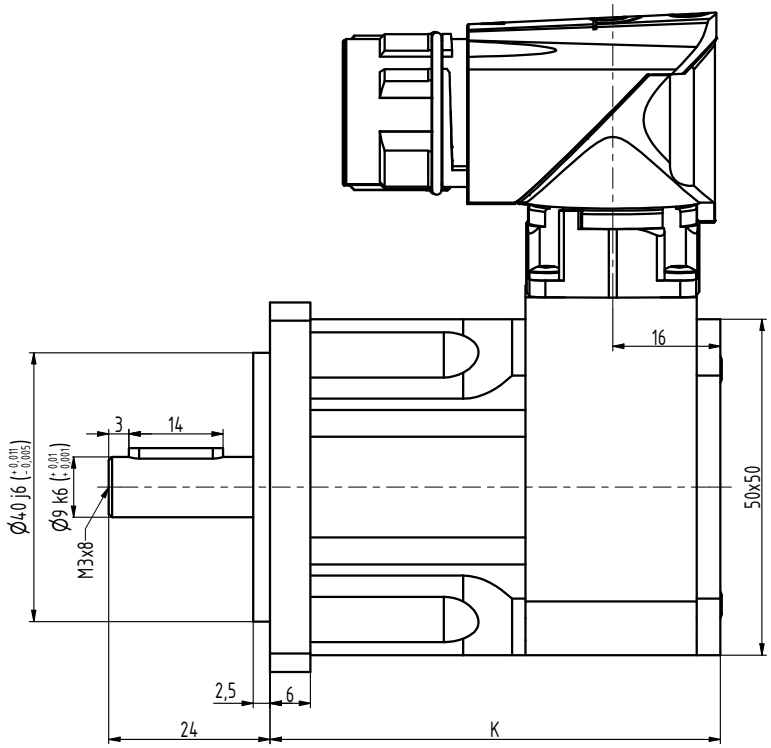

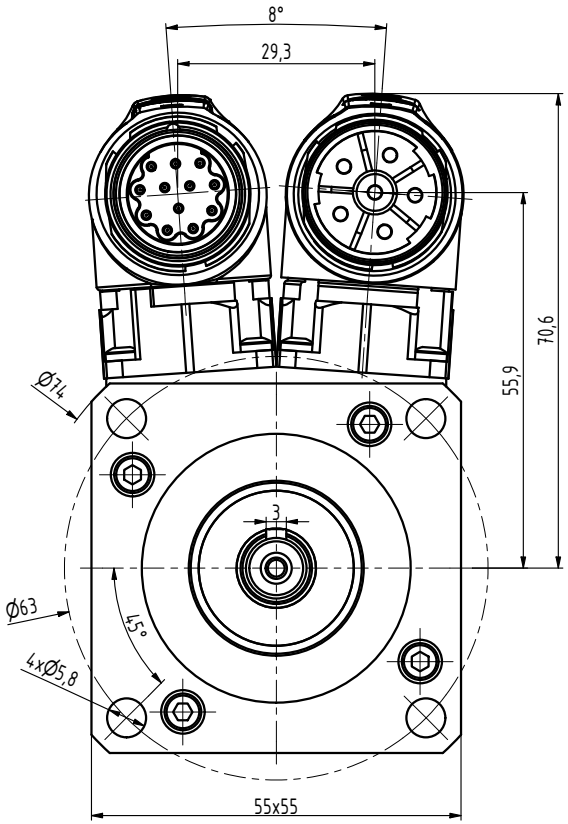

TYP	K
N2-0028	67
N2-0054	82
N2-0075	97
N2-0095	112
N2-0112	127

INDEX	ZMĚNA	DATUM	PODPIS

ZN.MAT.		T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.				
POM. ZAŘ.			ČSN	TŘ.Č.
VYPR. Ošlejšek	NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.				
TECHNOL.	SCHVÁLIL Ošlejšek	06.06.2024	STARÝ V.	Č.V.

NÁZEV

Motor N2

N2057 45 P Z_S4_S1

Listů List