Engineering data (WIN 936)		
DC bus voltage	560	V DC
Nominal AC voltage	380	V AC (rms)
Rated voltage	321	V AC (rms)
Rated power	5.5	kW
Rated speed	2500	rpm
Rated torque	21.00	Nm
Rated current	11.59	A (rms)
Peak torque	72	Nm
Peak current	38	A (rms)
Stall torque	24	Nm
Stall current	11.1	A (rms)
No load speed	2900	rpm
EMF constant ±10%	131	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	2.17	Nm / A (rms)
Torque constant ±10% @ rated load	1.81	Nm / A (rms)
Number of poles	10	
Electrical time constant	8.86	ms
Winding terminal resistance	0.88	Ω
Rotary field terminal inductance	7.8	mH

Customs info	
HS Code	85015220


Mechanical data (setting 5)		
Max mechanical speed	9000	rpm
Mech. time constant	0.61	ms
Thermal time constant	75	min
Rotor inertia	18.7	kgcm²
Protection	IP64	
Color	RAL 9005	
Cooling	Convection	
Max. axial force 20kh	157	N
Max. radial force 20kh*	824	N
Max. axial force 100kh	92	N
Max. radial force 100kh*	482	N

** Defined for point of action at ½ output shaft length*


Sensors	
Temperature	PTC 111-K13 {PTC 111-K13 Reissmann}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

Brake		
Braking torque	18.00	Nm
Voltage	24	V DC
Power @20°C	24.0	W
Current @20°C	1.00	A
Inertia	2.00	kgcm²
Mass	1.80	kg


Torque / speed curve

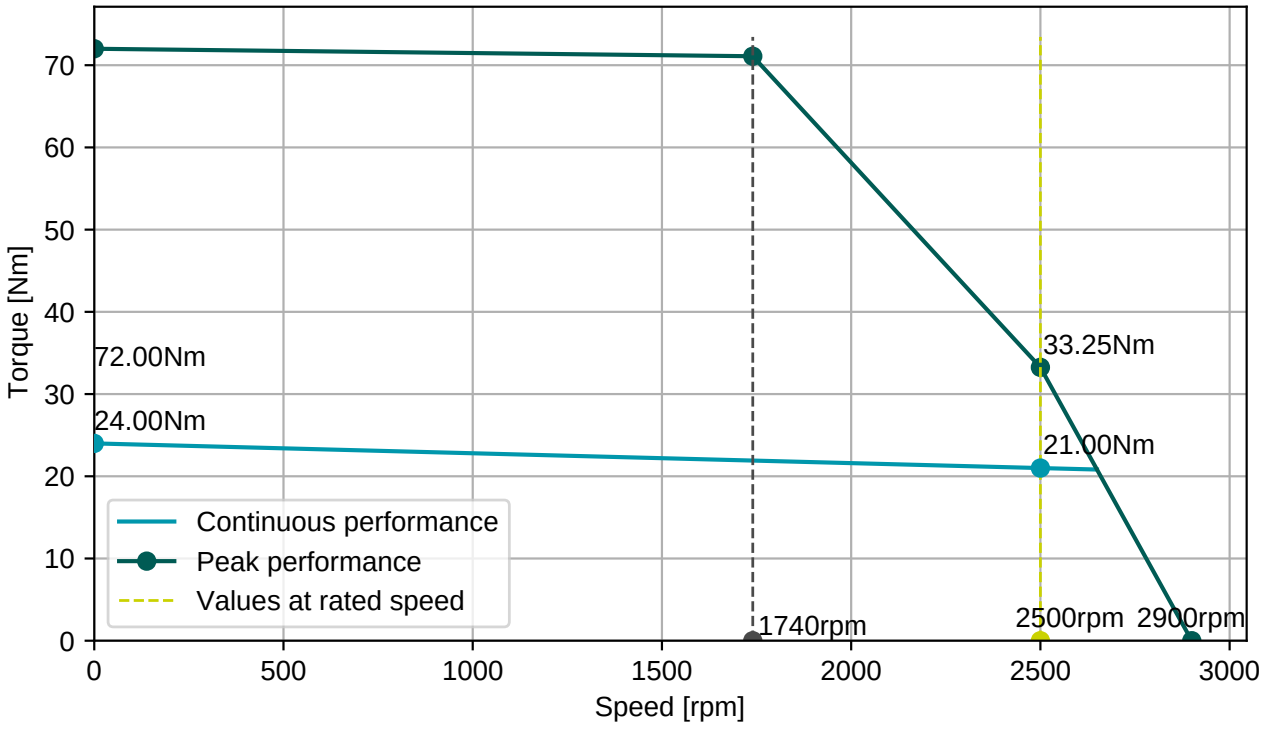

BGC110N00001216000
M23, 8 poles, rotary

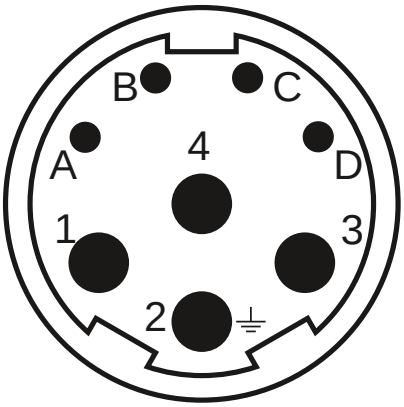



AGC052N00001215000
M23, 12 poles, rotary

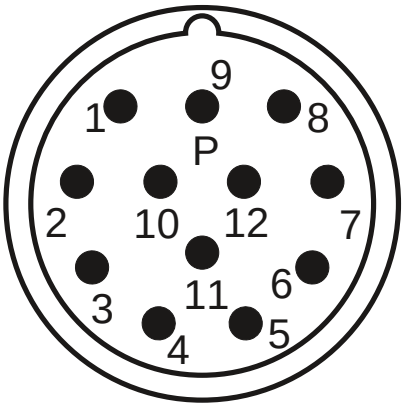

Connector 1 (9)	
1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (10)	
2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

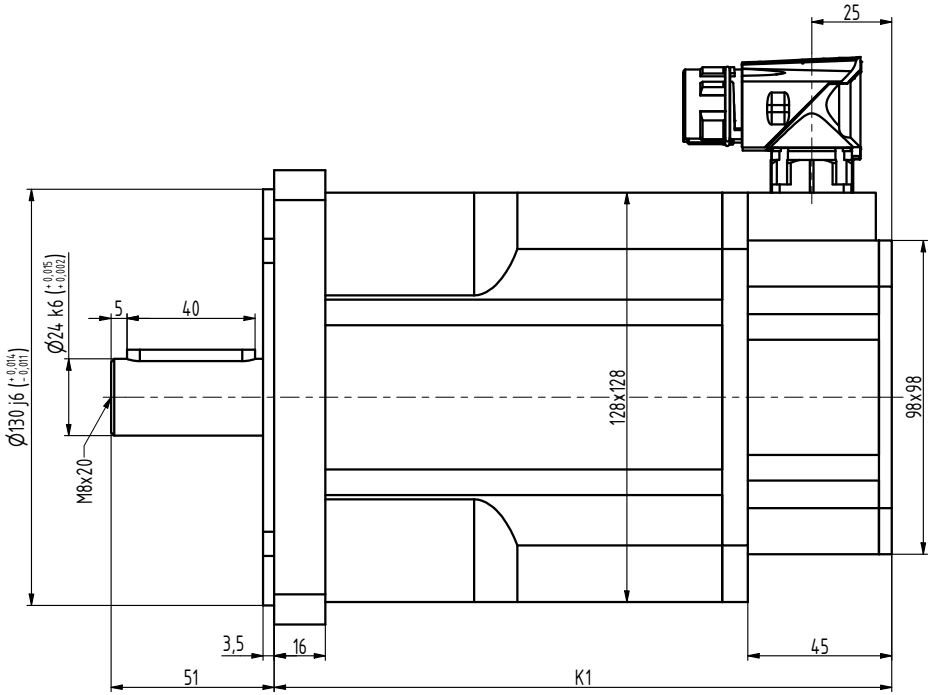

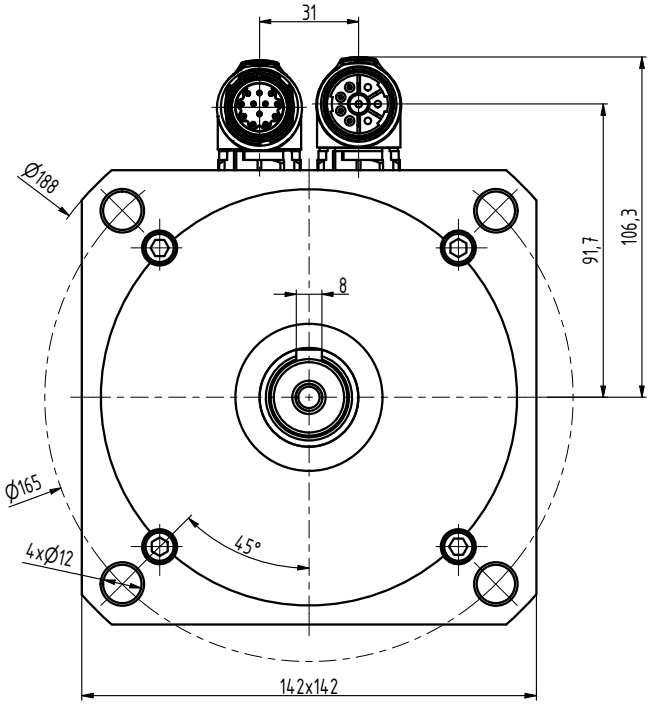

TYP	K1
N5-0650	163
N5-1200	193
N5-1600	223
N5-2000	253
N5-2400	283

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
POM. ZAŘ.				ČSN	TŘ.Č.
VYPR. Ošlejšek		NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.		SCHVÁLIL Ošlejšek	08.09.2021	STARÝ V.	Č.V.
NÁZEV	Motor N5			N5075 01 BP Z_S4_S1	
				Listů	List