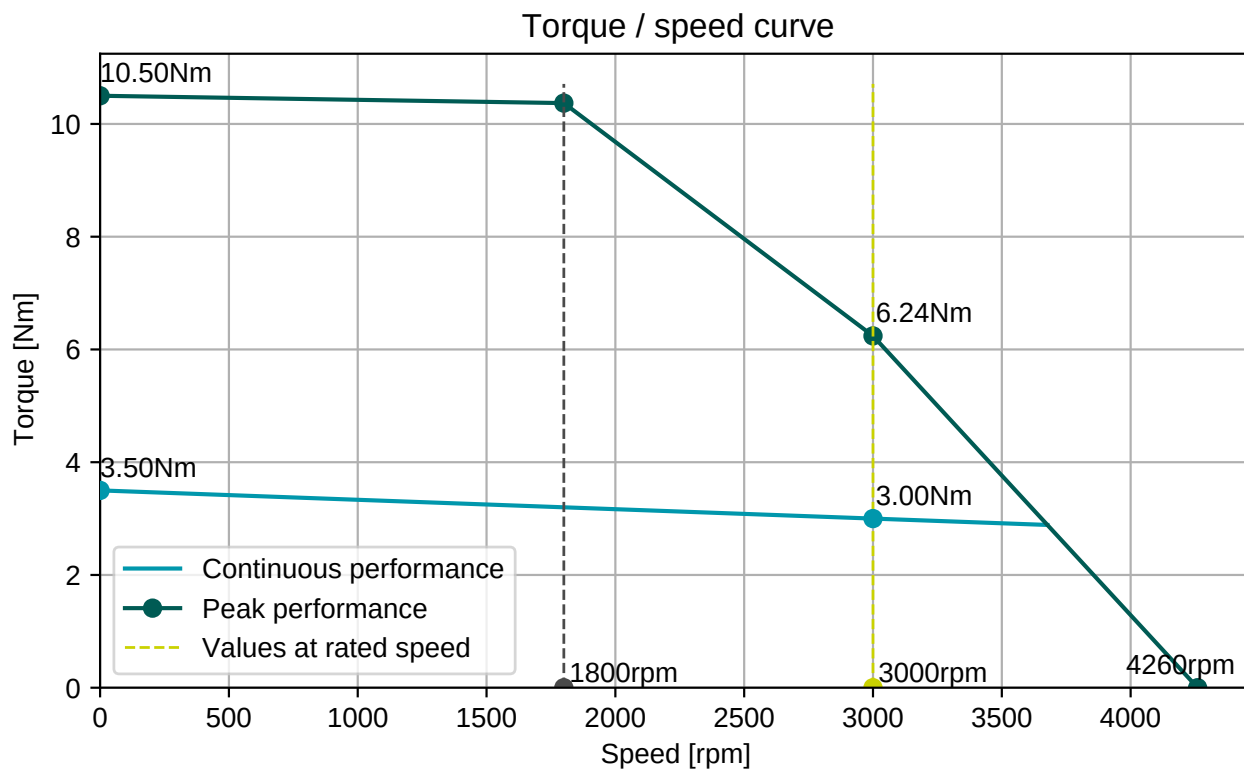


| Engineering data (WIN 707)        |                            | Mechanical data (setting 5)                                   |                                                        |
|-----------------------------------|----------------------------|---------------------------------------------------------------|--------------------------------------------------------|
| DC bus voltage                    | 560 V DC                   | Max mechanical speed                                          | 12000 rpm                                              |
| Nominal AC voltage                | 380 V AC (rms)             | Mech. time constant                                           | 0.74 ms                                                |
| Rated voltage                     | 278 V AC (rms)             | Thermal time constant                                         | 27 min                                                 |
| Rated power                       | 942 W                      | Rotor inertia                                                 | 1.04 kgcm <sup>2</sup>                                 |
| Rated speed                       | 3000 rpm                   | Protection                                                    | IP64                                                   |
| Rated torque                      | 3.00 Nm                    | Color                                                         | RAL 9005                                               |
| Rated current                     | 2.42 A (rms)               | Cooling                                                       | Convection                                             |
| Peak torque                       | 10.5 Nm                    | Max. axial force 20kh                                         | 75 N                                                   |
| Peak current                      | 10.9 A (rms)               | Max. radial force 20kh                                        | 394 N*                                                 |
| Stall torque                      | 3.5 Nm                     | Max. axial force 100kh                                        | 44 N                                                   |
| Stall current                     | 2.38 A (rms)               | Max. radial force 100kh                                       | 231 N*                                                 |
| No load speed                     | 4260 rpm                   | <i>* Defined for point of action at ½ output shaft length</i> |                                                        |
| EMF constant ±10%                 | 89 V AC (rms)<br>/ 1000rpm | Sensors                                                       |                                                        |
| Theoretical torque constant ±10%  | 1.47 Nm / A (rms)          | Temperature                                                   | PTC 111-K13 {PTC 111-K13 Reissmann}                    |
| Torque constant ±10% @ rated load | 1.24 Nm / A (rms)          | Feedback                                                      | 2-pole resolver ( ER5Kd411, TS2620N21E11, RE-15-1-A15) |
| Number of poles                   | 10                         | Brake                                                         |                                                        |
| Electrical time constant          | 2.87 ms                    | Braking torque                                                | 4.50 Nm                                                |
| Winding terminal resistance       | 8.89 Ω                     | Voltage                                                       | 24 V DC                                                |
| Rotary field terminal inductance  | 25.5 mH                    | Power @20°C                                                   | 12.0 W                                                 |
|                                   |                            | Current @20°C                                                 | 0.50 A                                                 |
|                                   |                            | Inertia                                                       | 0.20 kgcm <sup>2</sup>                                 |
|                                   |                            | Mass                                                          | 0.47 kg                                                |
| Customs info                      |                            |                                                               |                                                        |
| HS Code                           | 85015220                   |                                                               |                                                        |


**BGC110N00001216000**

M23, 8 poles, rotary


**AGC052N00001215000**

M23, 12 poles, rotary


**Connector 1 (9)**

|   |        |
|---|--------|
| 1 | U      |
| 4 | V      |
| 3 | W      |
| 2 | PE     |
| A | Brake+ |
| B | Brake- |
| C |        |
| D |        |

**Connector 2 (10)**

|   |        |
|---|--------|
| 2 | Therm+ |
| 3 | S4     |
| 4 | S3     |
| 5 | R2     |
| 6 | Therm- |
| 7 | S2     |
| 8 | S1     |
| 9 | R1     |

