


Engineering data (WIN 880)		Mechanical data (setting 5)	
DC bus voltage	560 V DC	Max mechanical speed	6000 rpm
Nominal AC voltage	380 V AC (rms)	Mech. time constant	0.73 ms
Rated voltage	274 V AC (rms)	Thermal time constant	47 min
Rated power	4.2 kW	Rotor inertia	25.6 kgcm ²
Rated speed	2000 rpm	Protection	IP64
Rated torque	20.00 Nm	Color	RAL 9005
Rated current	10.66 A (rms)	Cooling	Convection
Peak torque	72 Nm	Max. axial force 20kh	156 N
Peak current	42.3 A (rms)	Max. radial force 20kh	822 N*
Stall torque	24 Nm	Max. axial force 100kh	91 N
Stall current	10.8 A (rms)	Max. radial force 100kh	480 N*
No load speed	2830 rpm	<i>* Defined for point of action at ½ output shaft length</i>	
EMF constant ±10%	134 V AC (rms) / 1000rpm	Sensors	
Theoretical torque constant ±10%	2.22 Nm / A (rms)	Temperature	PTC 111-K13 {PTC 111-K13 Reissmann}
Torque constant ±10% @ rated load	1.88 Nm / A (rms)	Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)
Number of poles	10	Brake	
Electrical time constant	13.33 ms	Braking torque	36.00 Nm
Winding terminal resistance	0.81 Ω	Voltage	24 V DC
Rotary field terminal inductance	10.8 mH	Power @20°C	26.0 W
		Current @20°C	1.08 A
		Inertia	6.20 kgcm ²
		Mass	2.85 kg
Customs info			
HS Code	85015220		



BGC110N00001216000

M23, 8 poles, rotary

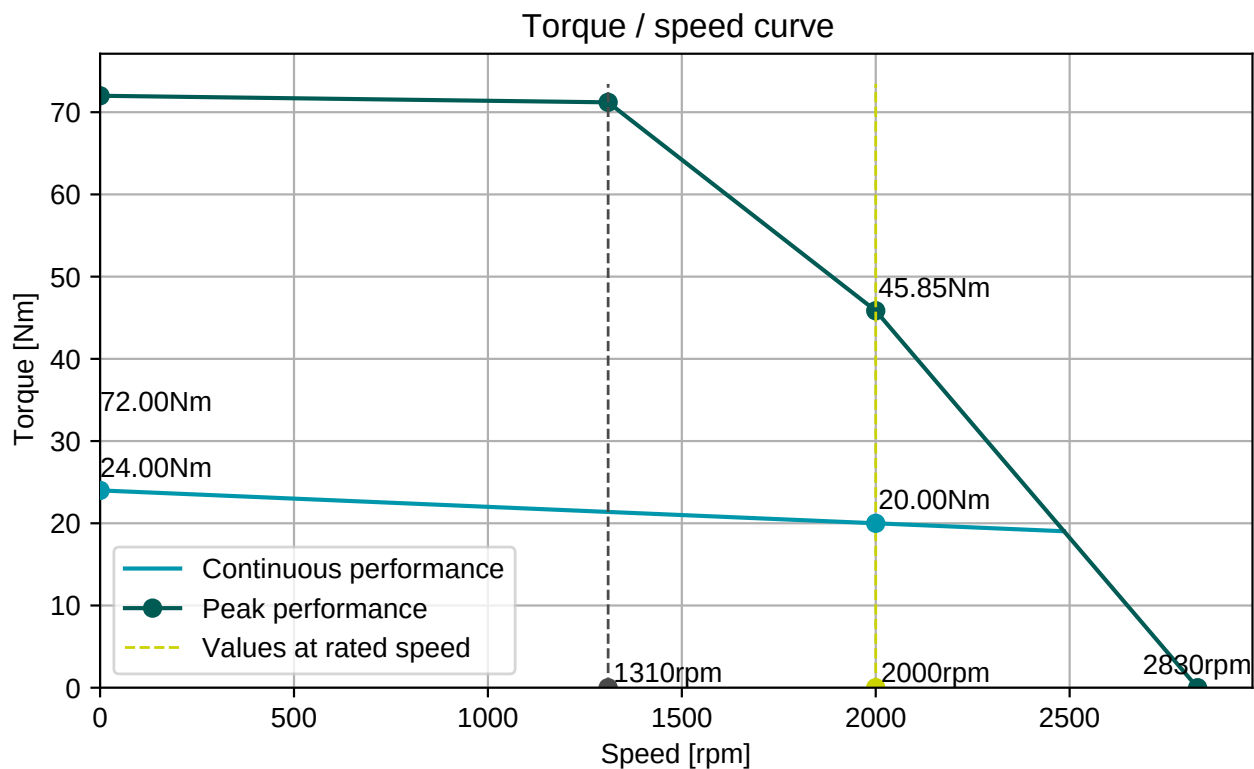

AGC052N00001215000

M23, 12 poles, rotary



Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (10)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

