

Engineering data (WIN 726)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	265 V AC (rms)
Rated power	872 W
Rated speed	4500 rpm
Rated torque	1.85 Nm
Rated current	2.56 A (rms)
Peak torque	6.15 Nm
Peak current	9.1 A (rms)
Stall torque	2.05 Nm
Stall current	2.25 A (rms)
No load speed	6880 rpm
EMF constant ±10%	55 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.91 Nm / A (rms)
Torque constant ±10% @ rated load	0.72 Nm / A (rms)
Number of poles	10
Electrical time constant	2.51 ms
Winding terminal resistance	8.2 Ω
Rotary field terminal inductance	20.6 mH

Customs info

HS Code	85015220
---------	----------


Mechanical data (setting 48)

Max mechanical speed	12000 rpm
Mech. time constant	0.94 ms
Thermal time constant	23 min
Rotor inertia	0.55 kgcm ²
Protection	IP67
Color	RAL 9005
Cooling	Convection
Max. axial force 20kh	61 N
Max. radial force 20kh	322 N*
Max. axial force 100kh	36 N
Max. radial force 100kh	188 N*

* Defined for point of action at ½ output shaft length

Sensors

Temperature	PT1000 {PT1000}
Feedback	EKM36 (HDSL) multi-turn, 17 + 12 bits

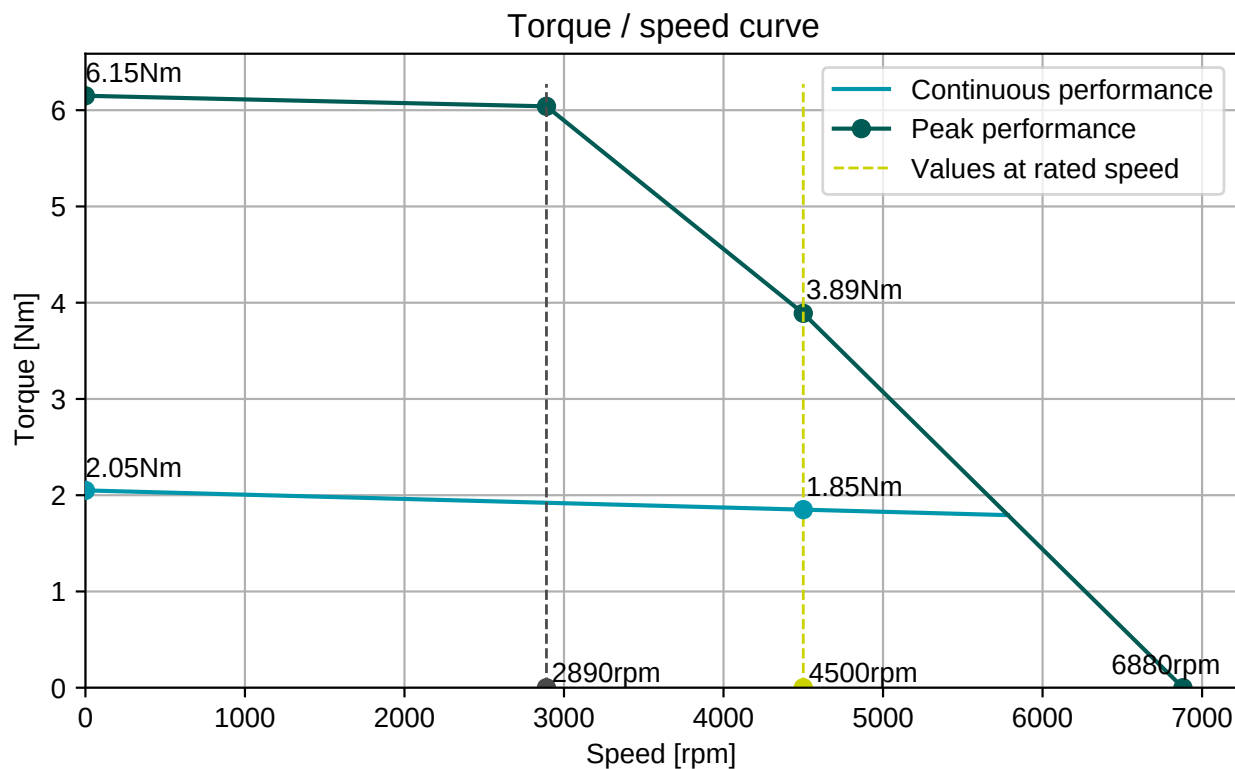

Cable DSL4x1 (2x0,25) , D=10,3±0,4mm

Connector 1 (306)	
1	U
2	V
3	W
PE	PE
5	Brake+
6	Brake-
brown	+Us/DSL+
white	GND/DSL-

Numbers printed on the cables

