

Engineering data (WIN 713)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	289 V AC (rms)
Rated power	2.4 kW
Rated speed	3000 rpm
Rated torque	7.70 Nm
Rated current	6.03 A (rms)
Peak torque	28.8 Nm
Peak current	27.4 A (rms)
Stall torque	9.6 Nm
Stall current	6 A (rms)
No load speed	3910 rpm
EMF constant ±10%	97 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	1.6 Nm / A (rms)
Torque constant ±10% @ rated load	1.3 Nm / A (rms)
Number of poles	10
Electrical time constant	6.01 ms
Winding terminal resistance	1.98 Ω
Rotary field terminal inductance	11.9 mH

Customs info

HS Code	85015220
---------	----------

Mechanical data (setting 5)

Max mechanical speed	9000 rpm
Mech. time constant	0.60 ms
Thermal time constant	35 min
Rotor inertia	4.49 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Max. axial force 20kh	131 N
Max. radial force 20kh	691 N*
Max. axial force 100kh	77 N
Max. radial force 100kh	404 N*


* Defined for point of action at ½ output shaft length

Sensors

Temperature	PTC 111-K13 {PTC 111-K13 Reissmann}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

Brake

Braking torque	9.00 Nm
Voltage	24 V DC
Power @20°C	18.0 W
Current @20°C	0.75 A
Inertia	0.60 kgcm ²
Mass	0.82 kg

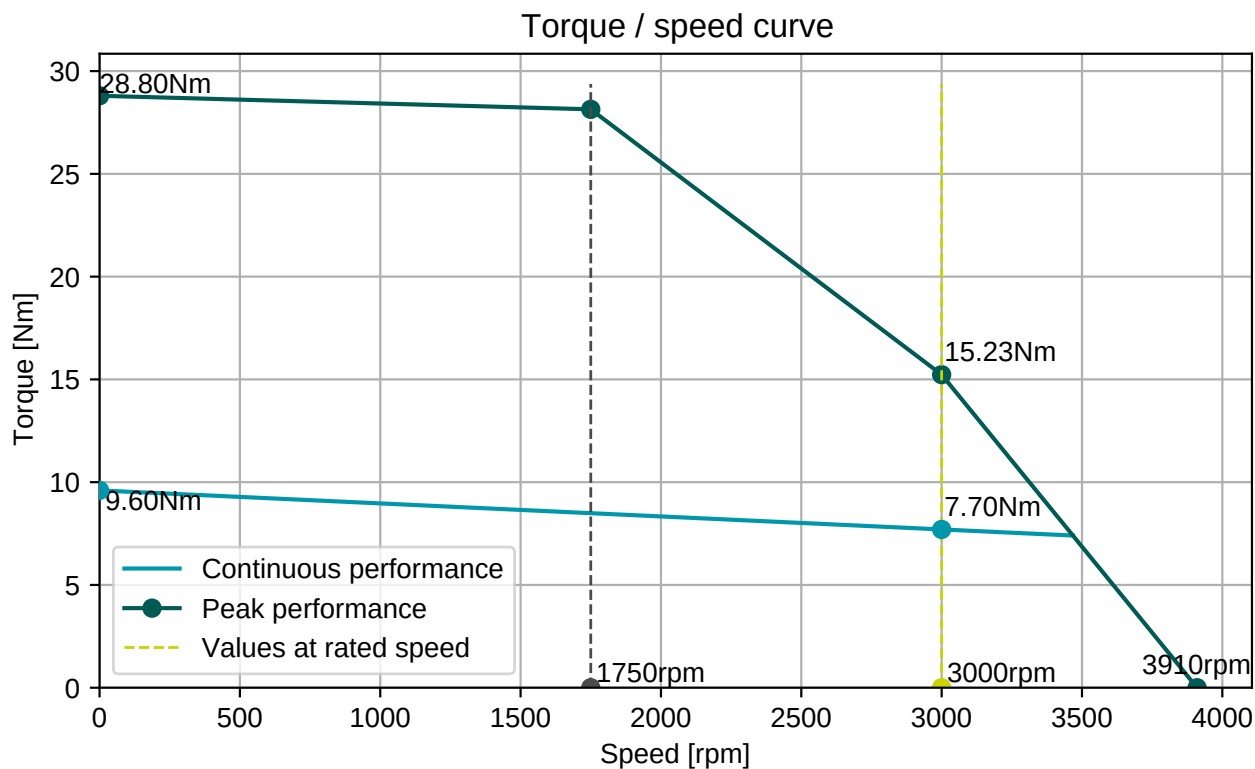


BGC110N00001216000

M23, 8 poles, rotary



AGC052N00001215000

M23, 12 poles, rotary

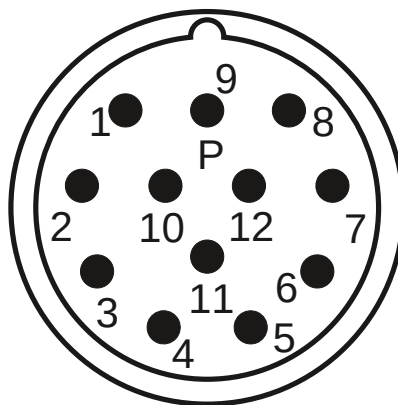

Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (10)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

