

Engineering data (WIN 905)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	263 V AC (rms)
Rated power	1.5 kW
Rated speed	5000 rpm
Rated torque	2.90 Nm
Rated current	3.9 A (rms)
Peak torque	14.4 Nm
Peak current	17.3 A (rms)
Stall torque	4.8 Nm
Stall current	4.84 A (rms)
No load speed	6320 rpm
EMF constant ±10%	60 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.99 Nm / A (rms)
Torque constant ±10% @ rated load	0.74 Nm / A (rms)
Number of poles	10
Electrical time constant	3.00 ms
Winding terminal resistance	2.5 Ω
Rotary field terminal inductance	7.5 mH

Customs info

HS Code	85015220
---------	----------


Mechanical data (setting 5)

Max mechanical speed	12000 rpm
Mech. time constant	0.67 ms
Thermal time constant	30 min
Rotor inertia	1.52 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Max. axial force 20kh	68 N
Max. radial force 20kh	356 N*
Max. axial force 100kh	40 N
Max. radial force 100kh	208 N*

* Defined for point of action at ½ output shaft length

Sensors

Temperature	PTC 111-K13 {PTC 111-K13 Reissmann}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

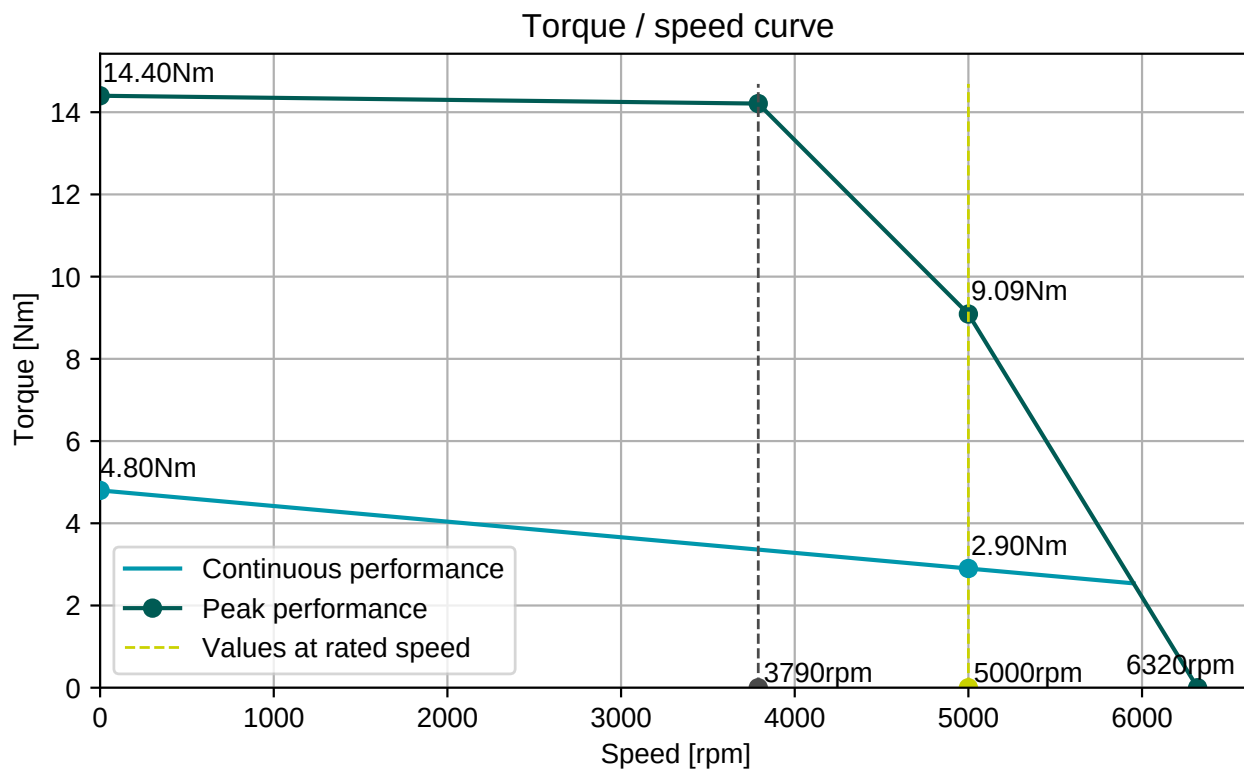

BGC110N00001216000

M23, 8 poles, rotary



AGC052N00001215000

M23, 12 poles, rotary



Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (10)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

