

Engineering data (WIN 1118)

DC bus voltage	560 V DC
Nominal AC voltage	380 V AC (rms)
Rated voltage	276 V AC (rms)
Rated power	2.1 kW
Rated speed	2000 rpm
Rated torque	9.80 Nm
Rated current	5.33 A (rms)
Peak torque	33.9 Nm
Peak current	19.3 A (rms)
Stall torque	11.3 Nm
Stall current	5.2 A (rms)
No load speed	2870 rpm
EMF constant ±10%	132 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	2.18 Nm / A (rms)
Torque constant ±10% @ rated load	1.84 Nm / A (rms)
Number of poles	10
Electrical time constant	6.34 ms
Winding terminal resistance	2.92 Ω
Rotary field terminal inductance	18.5 mH

Customs info

HS Code	85015220
---------	----------


Mechanical data (setting 48)

Max mechanical speed	9000 rpm
Mech. time constant	0.60 ms
Thermal time constant	40 min
Rotor inertia	5.7 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Max. axial force 20kh	155 N
Max. radial force 20kh	816 N*
Max. axial force 100kh	91 N
Max. radial force 100kh	477 N*

* Defined for point of action at ½ output shaft length


Sensors

Temperature	PT1000 {PT1000}
Feedback	EKS36 (HDSL) single-turn, 17 bits

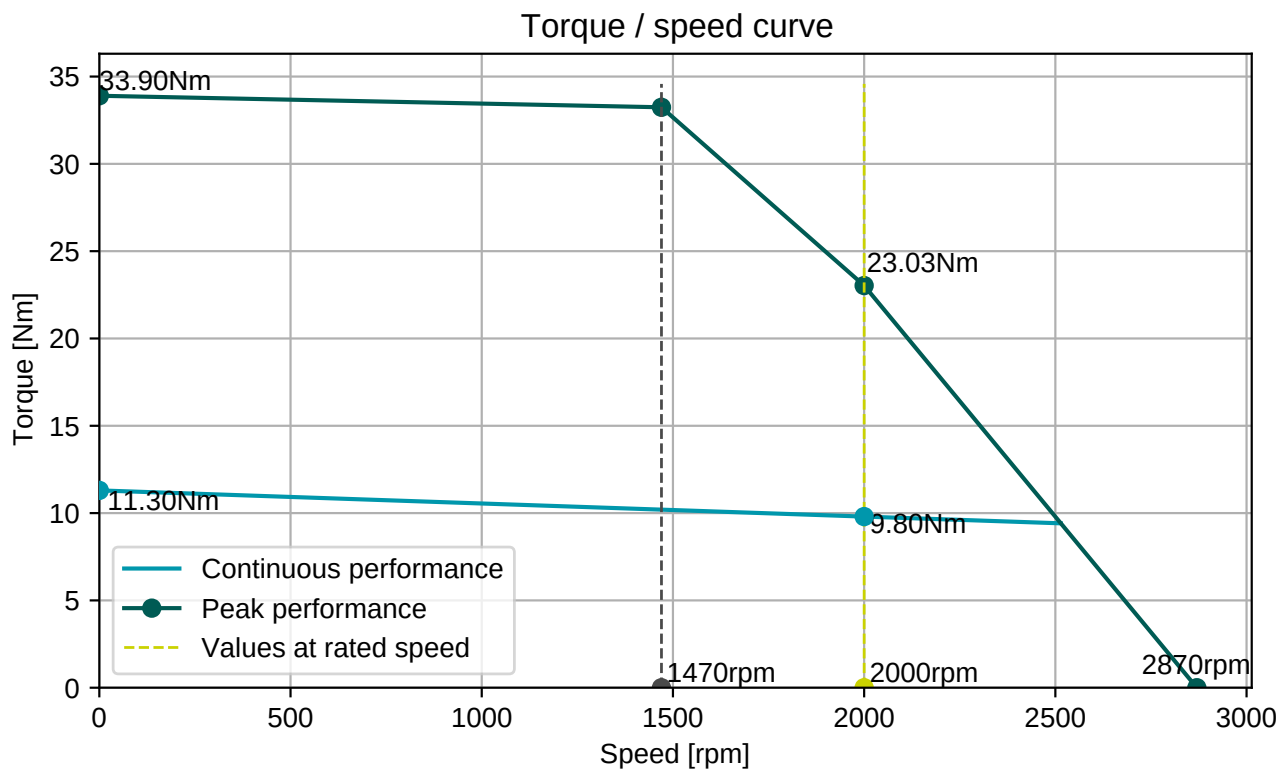

BGC110N00001216000

M23, 8 poles, rotary

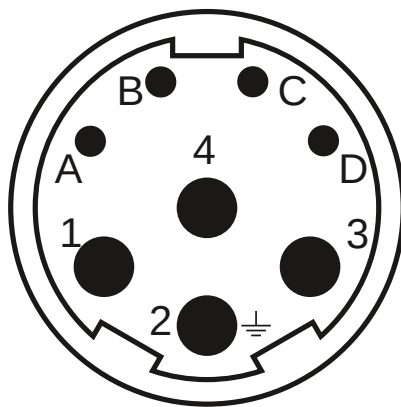

Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

