
| Engineering data (WIN 689) | | |
|---|---|---|
| DC bus voltage | 320 | V DC |
| Nominal AC voltage | 220 | V AC (rms) |
| Rated voltage | 135 | V AC (rms) |
| Rated power | 635 | W |
| Rated speed | 6000 | rpm |
| Rated torque | 1.01 | Nm |
| Rated current | 3.99 | A (rms) |
| Peak torque | 3.45 | Nm |
| Peak current | 16.3 | A (rms) |
| Stall torque | 1.15 | Nm |
| Stall current | 3.57 | A (rms) |
| No load speed | 11210 | rpm |
| EMF constant ±10% | 19 | V AC (rms) / 1000rpm |
| Theoretical torque constant ±10% | 0.32 | Nm / A (rms) |
| Torque constant ±10% @ rated load | 0.25 | Nm / A (rms) |
| Number of poles | 10 | |
| Electrical time constant | 2.24 | ms |
| Winding terminal resistance | 2.68 | Ω |
| Rotary field terminal inductance | 6 | mH |

| Customs info | |
|---|---|
| HS Code | 85015100 |

| Mechanical data (setting 48) | | |
|---|---|---|
| Max mechanical speed | 12000 | rpm |
| Mech. time constant | 1.46 | ms |
| Thermal time constant | 21 | min |
| Rotor inertia | 0.31 | kgcm² |
| Protection | IP64 | |
| Color | RAL 9005 | |
| Cooling | Convection | |


| Sensors | |
|---|---|
| Temperature | PT1000 {PT1000} |
| Feedback | EES37 (HDSL) single-turn, 17 bits |

Torque / speed curve

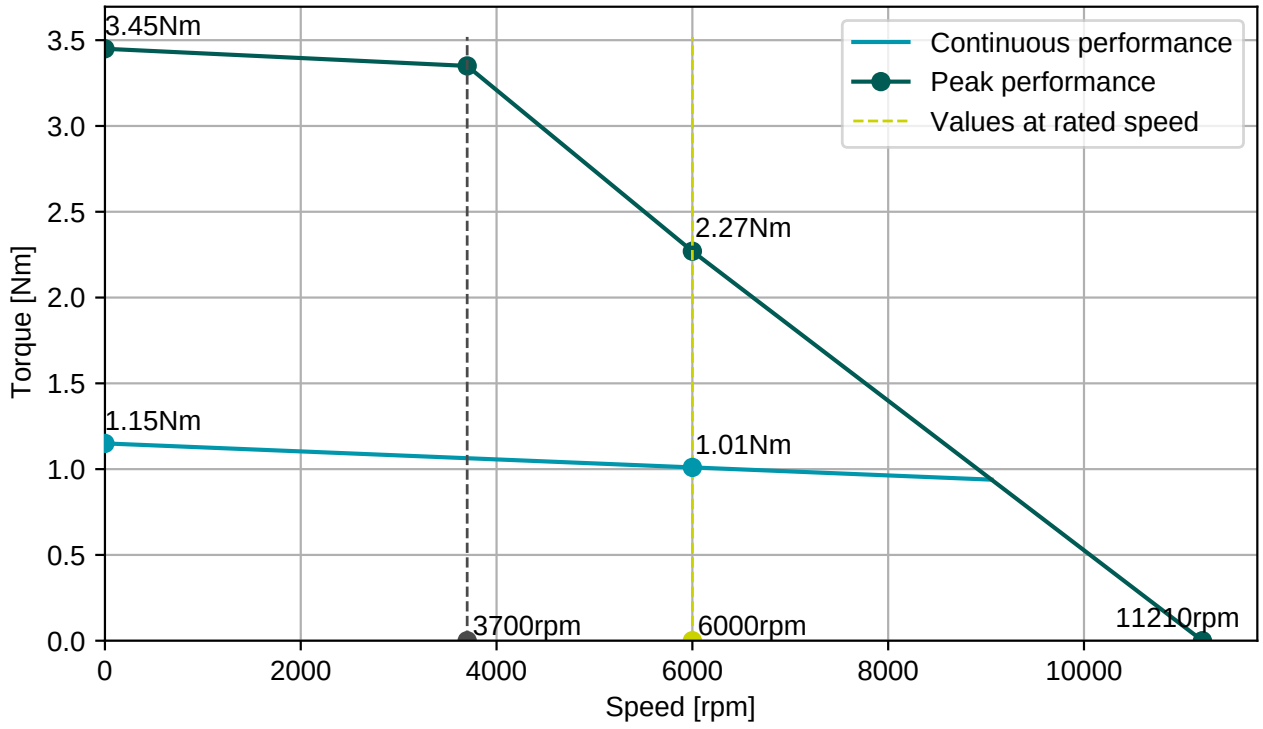



**BGC110N00001216000**

M23, 8 poles, rotary

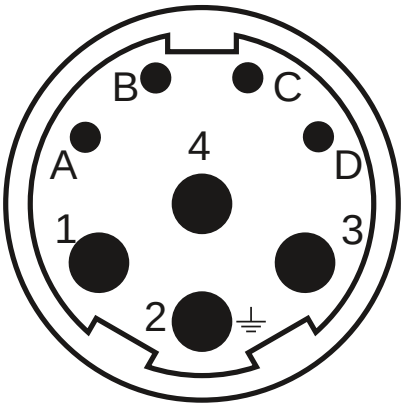


| Connector 1 (283) | |
|---|---|
| **1** | U |
| **4** | V |
| **3** | W |
| **2** | PE |
| **A** | Brake+ |
| **B** | Brake- |
| **C** | GND/DSL- |
| **D** | +Us/DSL+ |

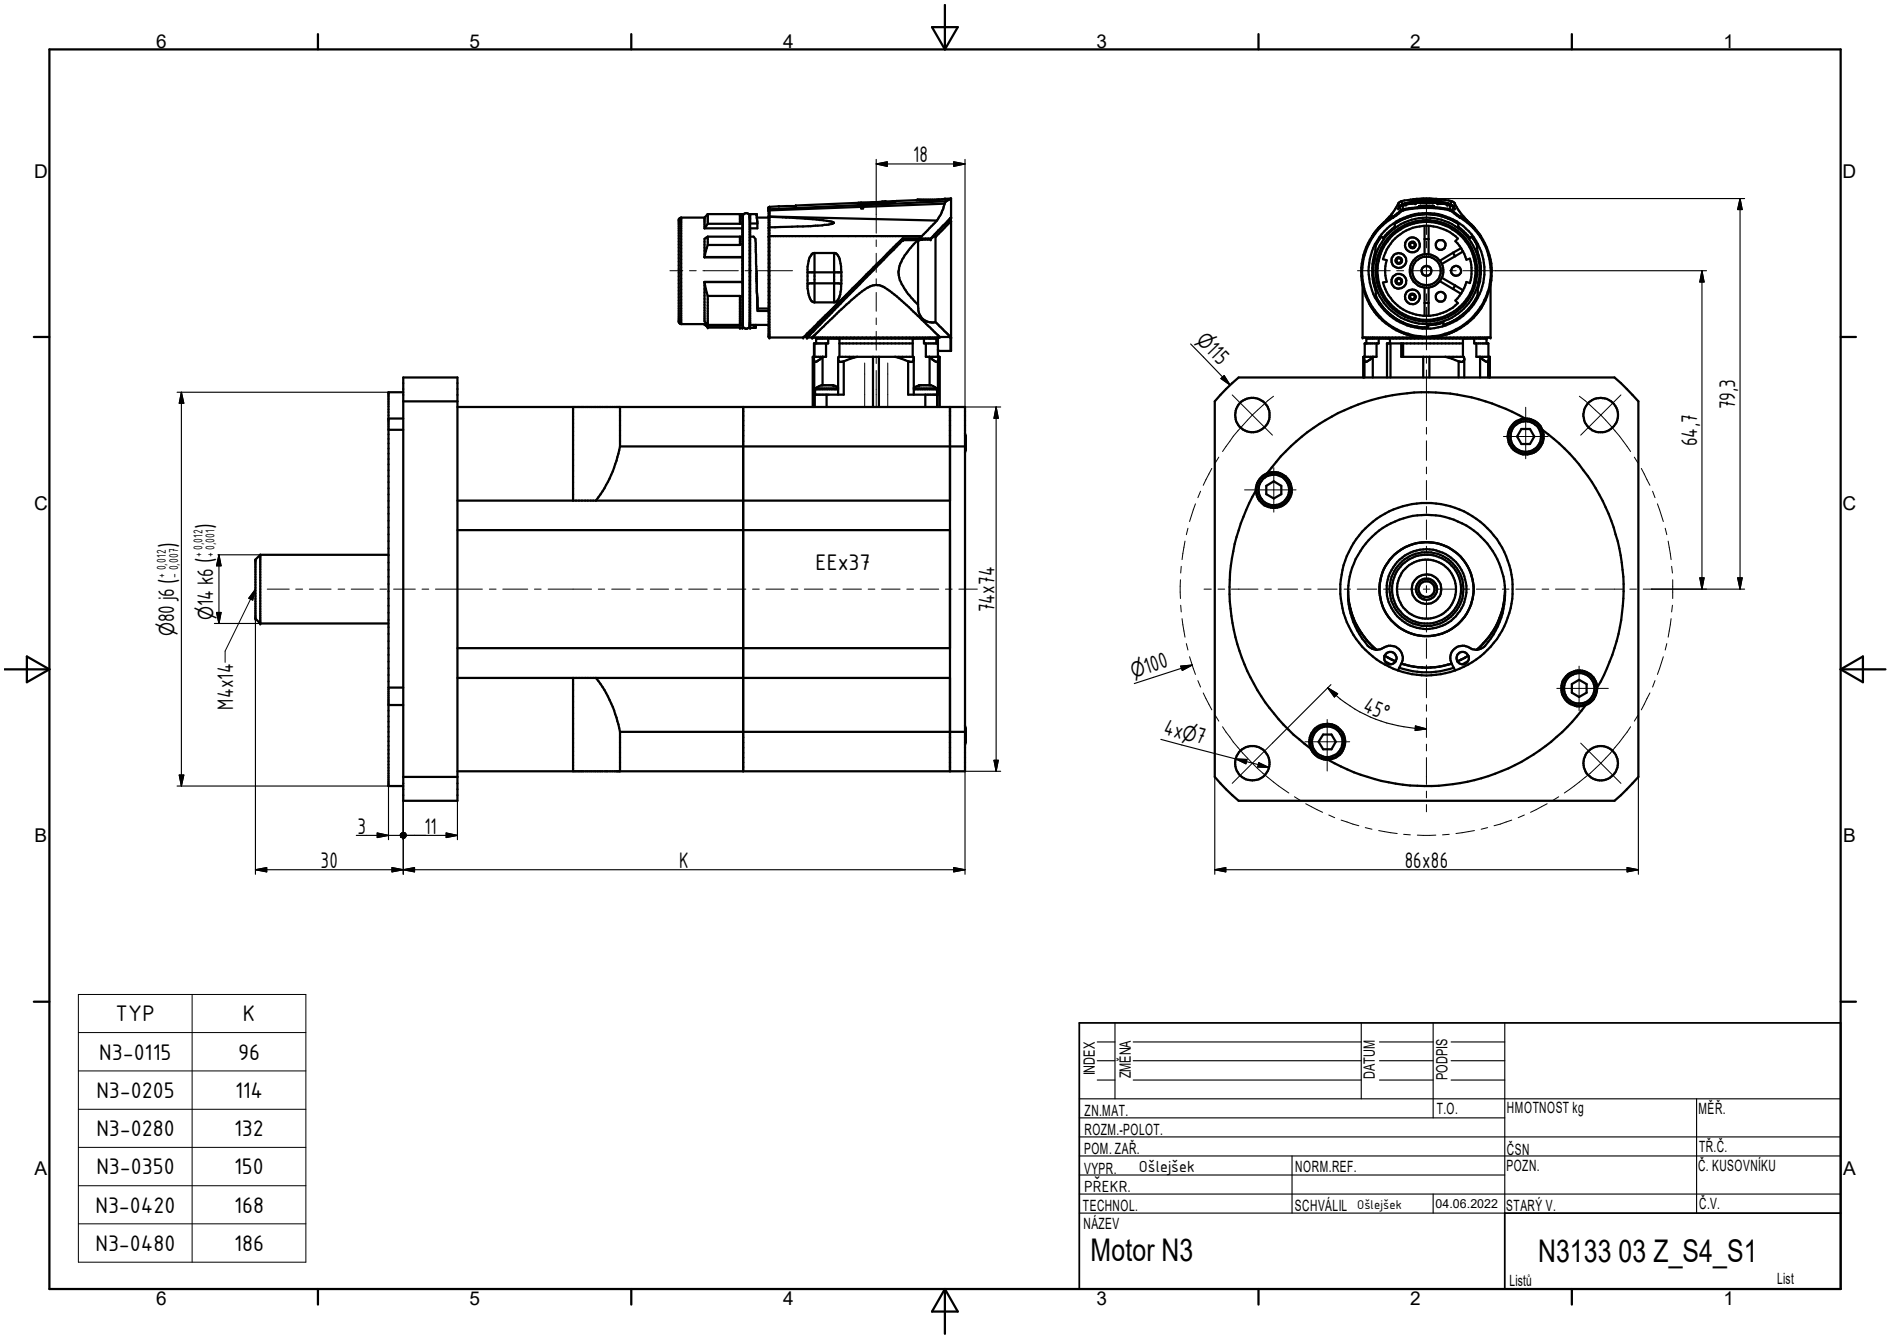


| TYP | K |
|---|---|
| N3-0115 | 96 |
| N3-0205 | 114 |
| N3-0280 | 132 |
| N3-0350 | 150 |
| N3-0420 | 168 |
| N3-0480 | 186 |

| INDEX | ZMĚNA | DATUM | PODPIS | | |
|---|---|---|---|---|---|
| ZN.MAT. | | | T.O. | HMOTNOST kg | MĚŘ. |
| ROZM.-POLOT. | | | | | |
| POM. ZAŘ. | | | | ČSN | TŘ.Č. |
| VYPR. Ošlejšek | | NORM.REF. | | POZN. | Č. KUSOVNÍKU |
| PŘEKR. | | | | | |
| TECHNOL. | | SCHVÁLIL Ošlejšek | 04.06.2022 | STARÝ V. | Č.V. |

NÁZEV

Motor N3

N3133 03 Z_S4_S1

Listů List