

Engineering data (WIN 996)

DC bus voltage	320 V DC
Nominal AC voltage	220 V AC (rms)
Rated voltage	173 V AC (rms)
Rated power	783 W
Rated speed	4000 rpm
Rated torque	1.87 Nm
Rated current	3.53 A (rms)
Peak torque	6.15 Nm
Peak current	12.7 A (rms)
Stall torque	2.05 Nm
Stall current	3.14 A (rms)
No load speed	5550 rpm
EMF constant ±10%	39.5 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.65 Nm / A (rms)
Torque constant ±10% @ rated load	0.53 Nm / A (rms)
Number of poles	10
Electrical time constant	2.52 ms
Winding terminal resistance	4.21 Ω
Rotary field terminal inductance	10.6 mH

Customs info

HS Code	85015220
---------	----------

Mechanical data (setting 48)

Max mechanical speed	12000 rpm
Mech. time constant	0.94 ms
Thermal time constant	23 min
Rotor inertia	0.55 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Max. axial force 20kh	64 N
Max. radial force 20kh	339 N*
Max. axial force 100kh	38 N
Max. radial force 100kh	198 N*

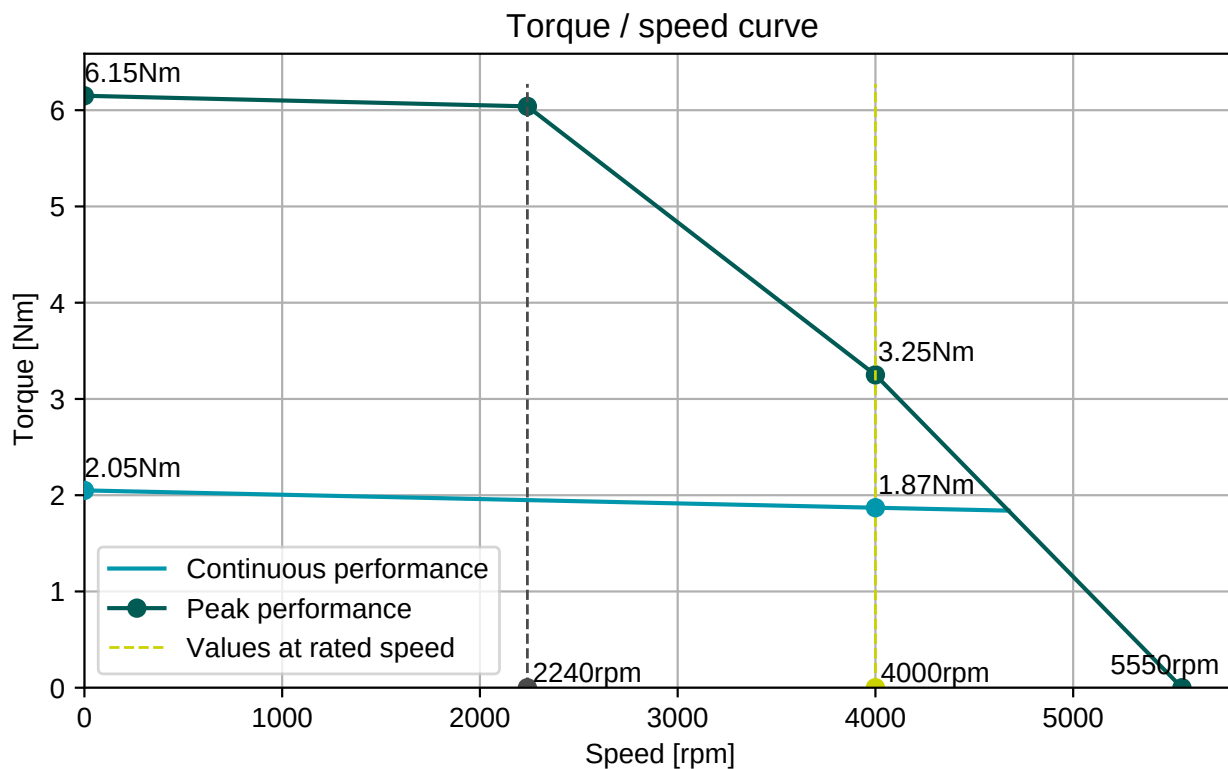
* Defined for point of action at ½ output shaft length

Sensors

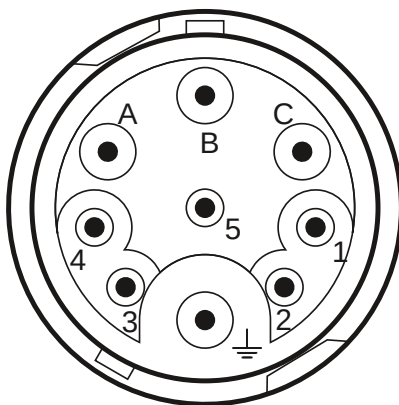
Temperature	PT1000 {PT1000}
Feedback	EES37 (HDSL) single-turn, 17 bits

Brake

Braking torque	4.50 Nm
Voltage	24 V DC
Power @20°C	12.0 W
Current @20°C	0.50 A
Inertia	0.20 kgcm ²
Mass	0.47 kg


EGA201N00000800000

M15, 9 poles, rotary


Connector 1 (304)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-
3	+Us/DSL+
4	GND/DSL-

