

Engineering data (WIN 1073)

DC bus voltage	320 V DC
Nominal AC voltage	220 V AC (rms)
Rated voltage	160 V AC (rms)
Rated power	518 W
Rated speed	1500 rpm
Rated torque	3.30 Nm
Rated current	2.48 A (rms)
Peak torque	10.5 Nm
Peak current	8.6 A (rms)
Stall torque	3.5 Nm
Stall current	2.38 A (rms)
No load speed	2460 rpm
EMF constant ±10%	89 V AC (rms) / 1000rpm
Theoretical torque constant ±10%	1.47 Nm / A (rms)
Torque constant ±10% @ rated load	1.33 Nm / A (rms)
Number of poles	10
Electrical time constant	2.88 ms
Winding terminal resistance	8.89 Ω
Rotary field terminal inductance	25.6 mH

Customs info

HS Code	85015100
---------	----------


Mechanical data (setting 5)

Max mechanical speed	12000 rpm
Mech. time constant	0.74 ms
Thermal time constant	27 min
Rotor inertia	1.04 kgcm ²
Protection	IP64
Color	RAL 9005
Cooling	Convection
Max. axial force 20kh	94 N
Max. radial force 20kh	495 N*
Max. axial force 100kh	55 N
Max. radial force 100kh	290 N*



* Defined for point of action at ½ output shaft length

Sensors

Temperature	PTC 111-K13 {PTC 111-K13 Reissmann}
Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)

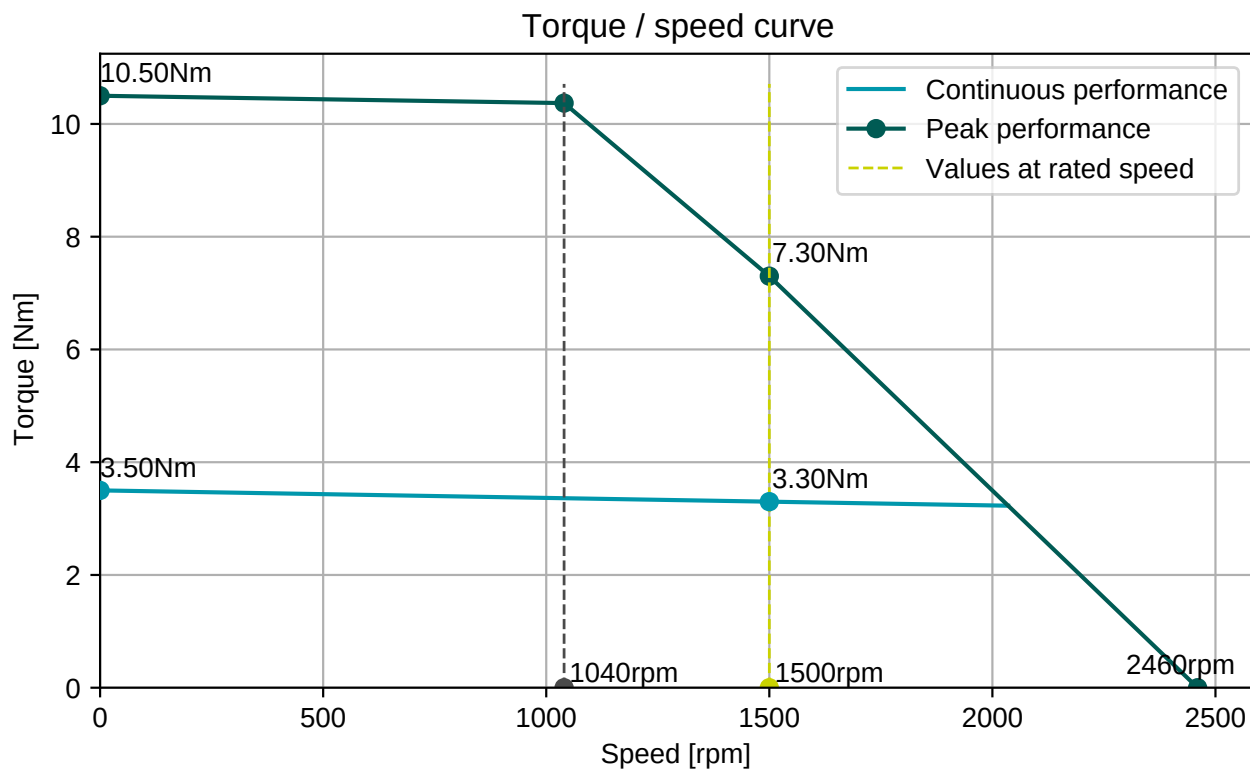

EGA101N00000001000
 2x M15, 9 and 12 poles rotary

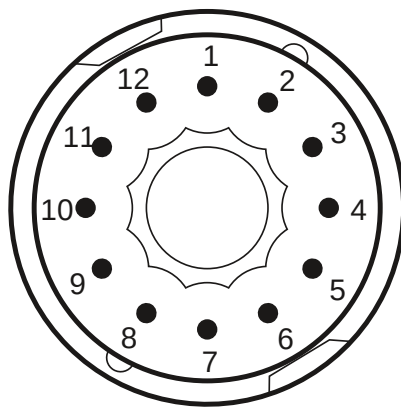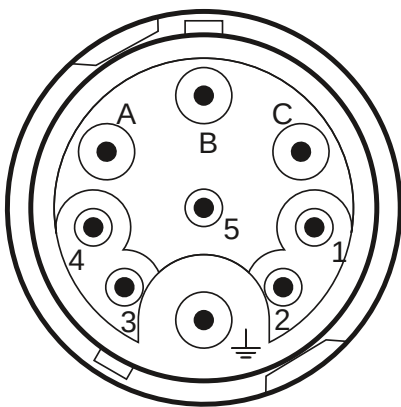

Connector 1 (226)

A	U
B	V
C	W
PE	PE
1	Brake+
2	Brake-

Connector 2 (227)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

