



Engineering data (WIN 925)		Mechanical data (setting 48)	
DC bus voltage	320 V DC	Max mechanical speed	12000 rpm
Nominal AC voltage	220 V AC (rms)	Mech. time constant	0.75 ms
Rated voltage	164 V AC (rms)	Thermal time constant	27 min
Rated power	1.6 kW	Rotor inertia	1.04 kgcm ²
Rated speed	6000 rpm	Protection	IP64
Rated torque	2.50 Nm	Color	RAL 9005
Rated current	6.76 A (rms)	Cooling	Convection
Peak torque	10.5 Nm	Max. axial force 20kh	59 N
Peak current	24.6 A (rms)	Max. radial force 20kh	313 N*
Stall torque	3.5 Nm	Max. axial force 100kh	35 N
Stall current	6.8 A (rms)	Max. radial force 100kh	183 N*
No load speed	7080 rpm	<i>* Defined for point of action at ½ output shaft length</i>	
EMF constant ±10%	31 V AC (rms) / 1000rpm	Sensors	
Theoretical torque constant ±10%	0.51 Nm / A (rms)	Temperature	PT1000 {PT1000}
Torque constant ±10% @ rated load	0.37 Nm / A (rms)	Feedback	EKS36 (HDSL) single-turn, 17 bits
Number of poles	10	Brake	
Electrical time constant	2.82 ms	Braking torque	4.50 Nm
Winding terminal resistance	1.1 Ω	Voltage	24 V DC
Rotary field terminal inductance	3.1 mH	Power @20°C	12.0 W
		Current @20°C	0.50 A
		Inertia	0.20 kgcm ²
		Mass	0.47 kg
Customs info			
HS Code	85015220		

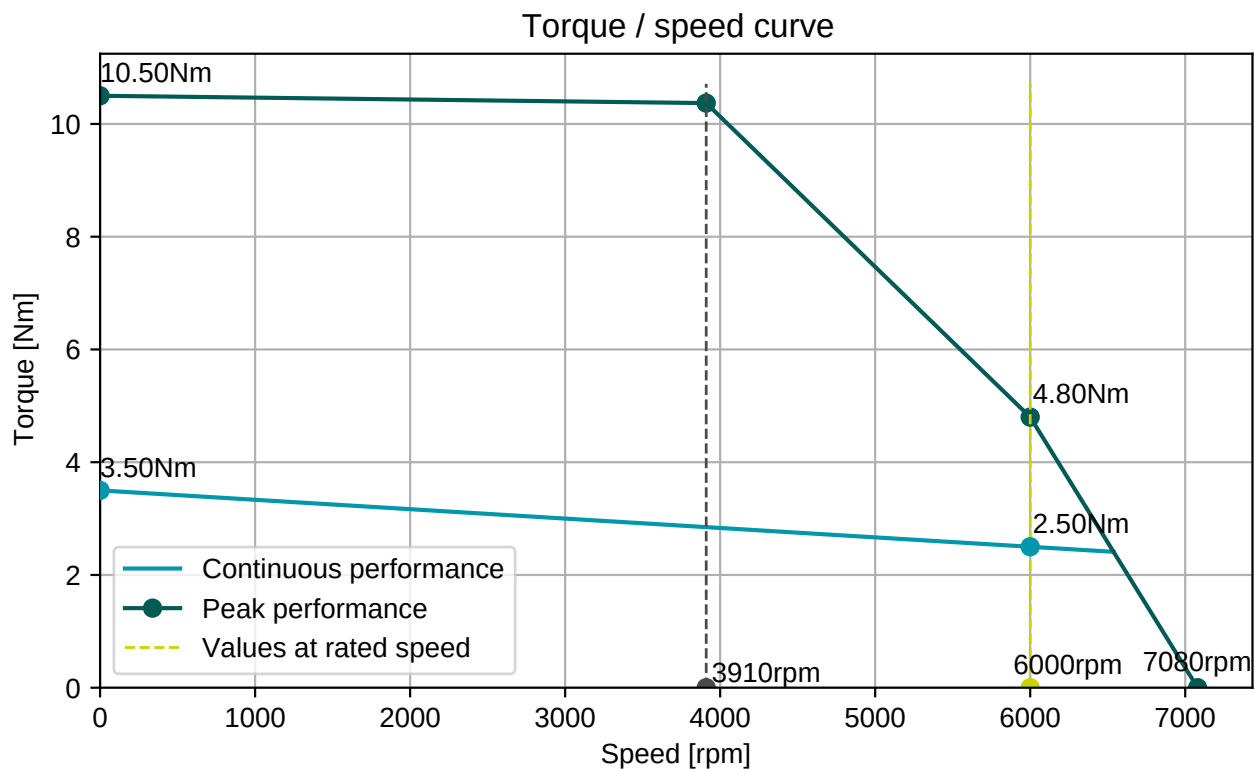

BGC110N00001216000

M23, 8 poles, rotary

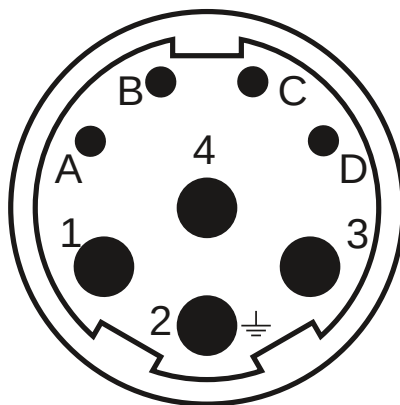

Connector 1 (283)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	GND/DSL-
D	+Us/DSL+

