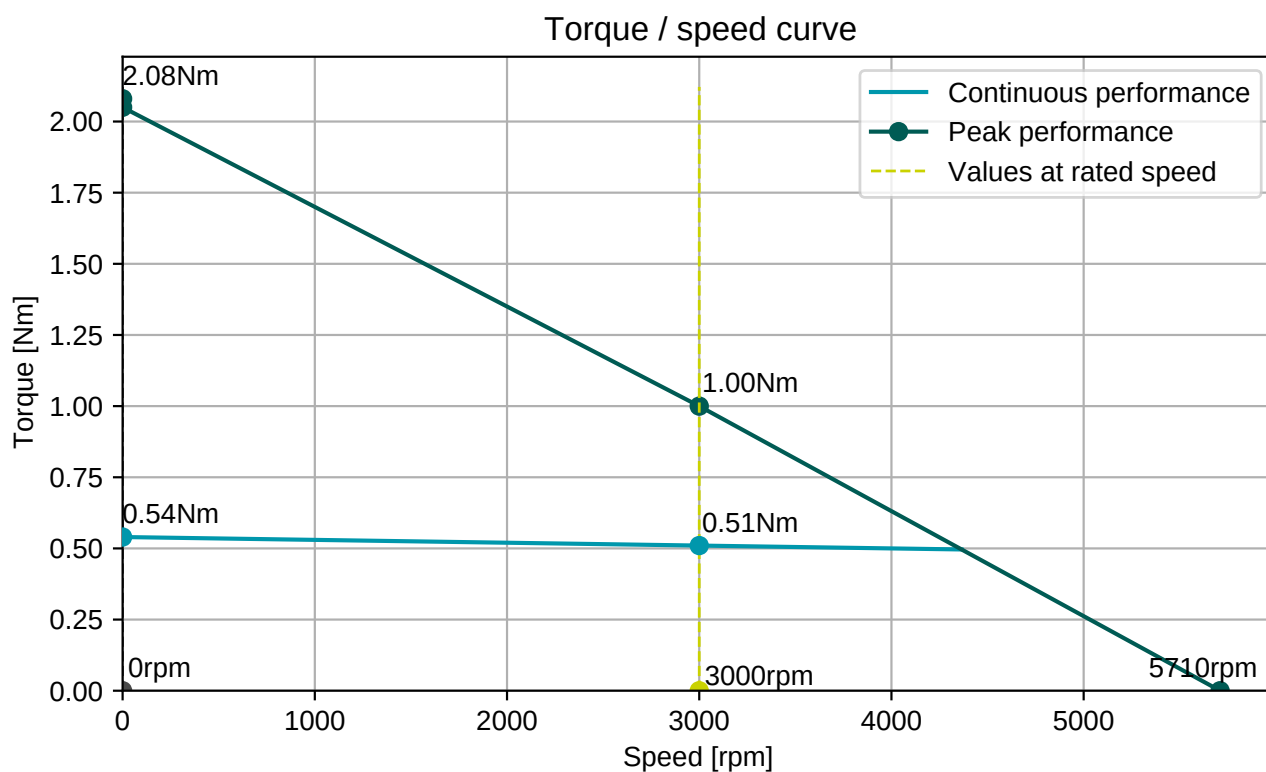
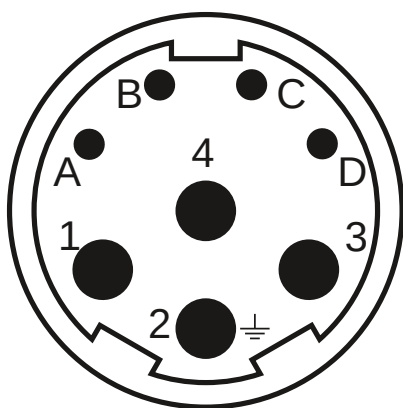



Engineering data (WIN 777)		Mechanical data (setting 5)	
DC bus voltage	36 V DC	Max mechanical speed	12000 rpm
Nominal AC voltage	25 V AC (rms)	Mech. time constant	1.49 ms
Rated voltage	19 V AC (rms)	Thermal time constant	12 min
Rated power	160 W	Rotor inertia	0.07 kgcm ²
Rated speed	3000 rpm	Protection	IP64
Rated torque	0.51 Nm	Color	RAL 9005
Rated current	7.65 A (rms)	Cooling	Convection
Peak torque	2.08 Nm	Max. axial force 20kh	48 N
Peak current	33.2 A (rms)	Max. radial force 20kh	254 N*
Stall torque	0.54 Nm	Max. axial force 100kh	28 N
Stall current	7.6 A (rms)	Max. radial force 100kh	149 N*
No load speed	5710 rpm	<i>* Defined for point of action at ½ output shaft length</i>	
EMF constant ±10%	4.3 V AC (rms) / 1000rpm	Sensors	
Theoretical torque constant ±10%	0.07 Nm / A (rms)	Temperature	PTC 111-K13 {PTC 111-K13 Reissmann}
Torque constant ±10% @ rated load	0.07 Nm / A (rms)	Feedback	2-pole resolver (ER5Kd411, TS2620N21E11, RE-15-1-A15)
Number of poles	6	Brake	
Electrical time constant	1.23 ms	Braking torque	2.00 Nm
Winding terminal resistance	0.62 Ω	Voltage	24 V DC
Rotary field terminal inductance	0.76 mH	Power @20°C	11.0 W
		Current @20°C	0.46 A
		Inertia	0.08 kgcm ²
		Mass	0.20 kg
Customs info			
HS Code	85015100		


BGC110N00001216000

M23, 8 poles, rotary


AGC052N00001215000

M23, 12 poles, rotary

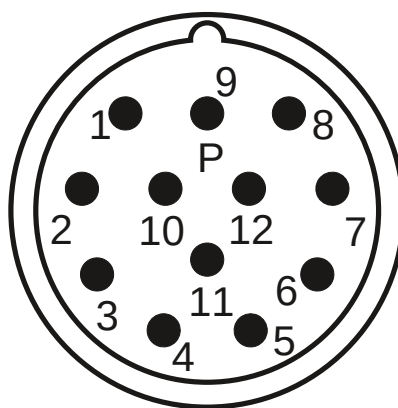
Connector 1 (9)

1	U
4	V
3	W
2	PE
A	Brake+
B	Brake-
C	
D	

Connector 2 (10)

2	Therm+
3	S4
4	S3
5	R2
6	Therm-
7	S2
8	S1
9	R1

