Engineering data (WIN -100097)		
DC bus voltage	130	V DC
Nominal AC voltage	90	V AC (rms)
Rated voltage	62	V AC (rms)
Rated power	355	W
Rated speed	3000	rpm
Rated torque	1.13	Nm
Rated current	5.14	A (rms)
Peak torque	3.45	Nm
Peak current	19.75	A (rms)
Stall torque	1.15	Nm
Stall current	4.49	A (rms)
No load speed	5750	rpm
EMF constant ±10%	15.5	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.26	Nm / A (rms)
Torque constant ±10% @ rated load	0.22	Nm / A (rms)
Number of poles	10	
Electrical time constant	2.24	ms
Winding terminal resistance	1.68	Ω
Rotary field terminal inductance	3.77	mH

Customs info	
HS Code	85015100


Mechanical data (setting 5)		
Max mechanical speed	12000	rpm
Mech. time constant	1.37	ms
Thermal time constant	21	min
Rotor inertia	0.31	kgcm²
Protection	IP64	
Color	RAL 9005	
Cooling	Convection	
Motor-only mass	1.5	kg
Max. axial force 20kh	72	N
Max. radial force 20kh*	378	N
Max. axial force 100kh	42	N
Max. radial force 100kh*	221	N

** Defined for point of action at ½ output shaft length*

Sensors	
Temperature	PT1000 {PT1000}
Feedback	ELS35-0CA0A024A

Note
Cables length 1m

Torque / speed curve

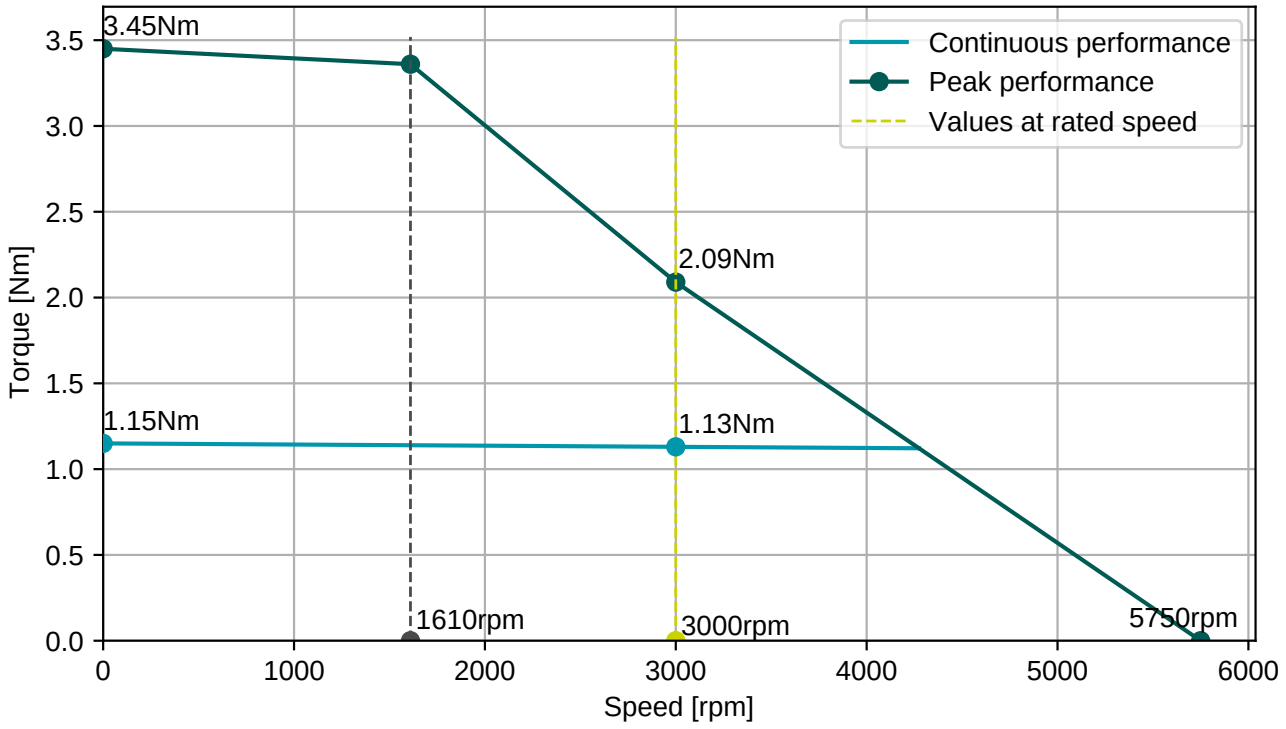


Cable SF4x1,5, D=9,6±0,4mm


Connector 1 (21)	
1	U
2	V
3	W
PE	PE
5	Brake+
6	Brake-

Numbers printed on the cables

Cable R4x2x0,25, D=6,8±0,4mm

Connector 2

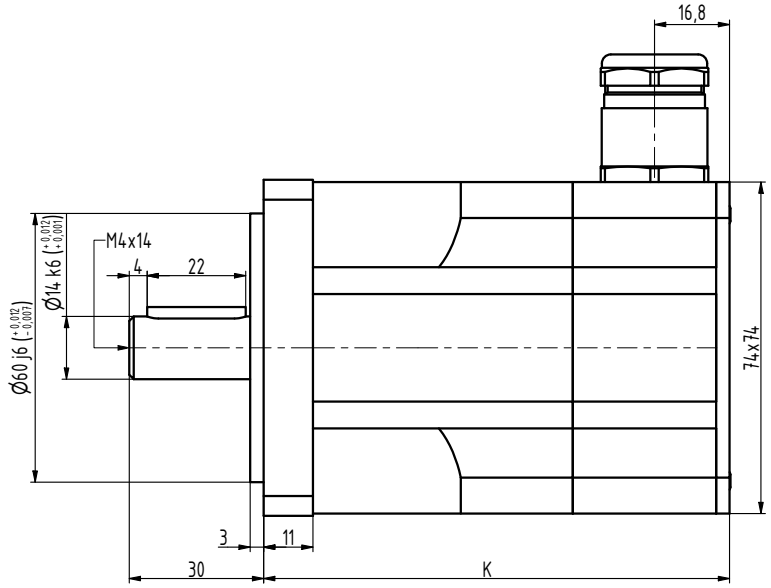

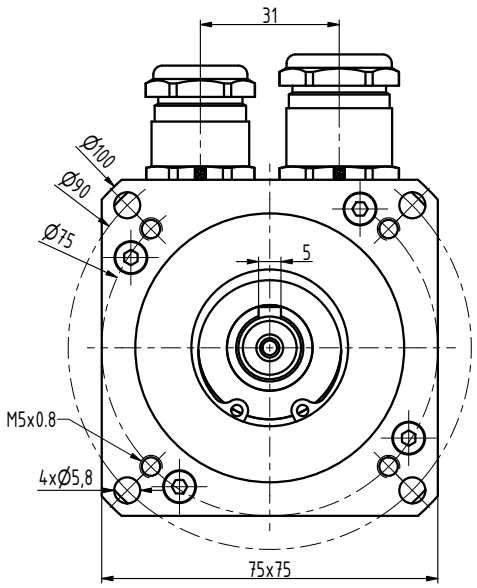

TYP	K
N3-0115	86
N3-0205	104
N3-0280	122
N3-0350	140
N3-0420	158
N3-0480	176

INDEX	ZMĚNA	DATUM	PODPIS		
ZN.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
POM. ZAŘ.				ČSN	TŘ.Č.
VYPR.		NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.		SCHVÁLIL	17.08.2026	STARÝ V.	Č.V.

NÁZEV
Motor N3

N3111 xx P Z

Listů List