

Engineering data	
Input voltage	400 V AC 3~
Output voltage	560 V DC
Max input current	32 A
Max continuous current	25 A
Max short term current	50 A
Max output power	15.0 kW
Max internal braking power	400 W
Max external braking power	15.8 kW
Losses at max load	100 W


Customs info	
HS Code	85044087

Mechanical data	
Protection	IP20
Operating temperature	<0; 40> °C


Digital outputs	
1x Ready	Max. 28 V DC / 700 mA
1x Error	Max. 28 V DC / 700 mA

Signaling LEDs	
1x Green	Ready
1x Red	Error

Dimensions

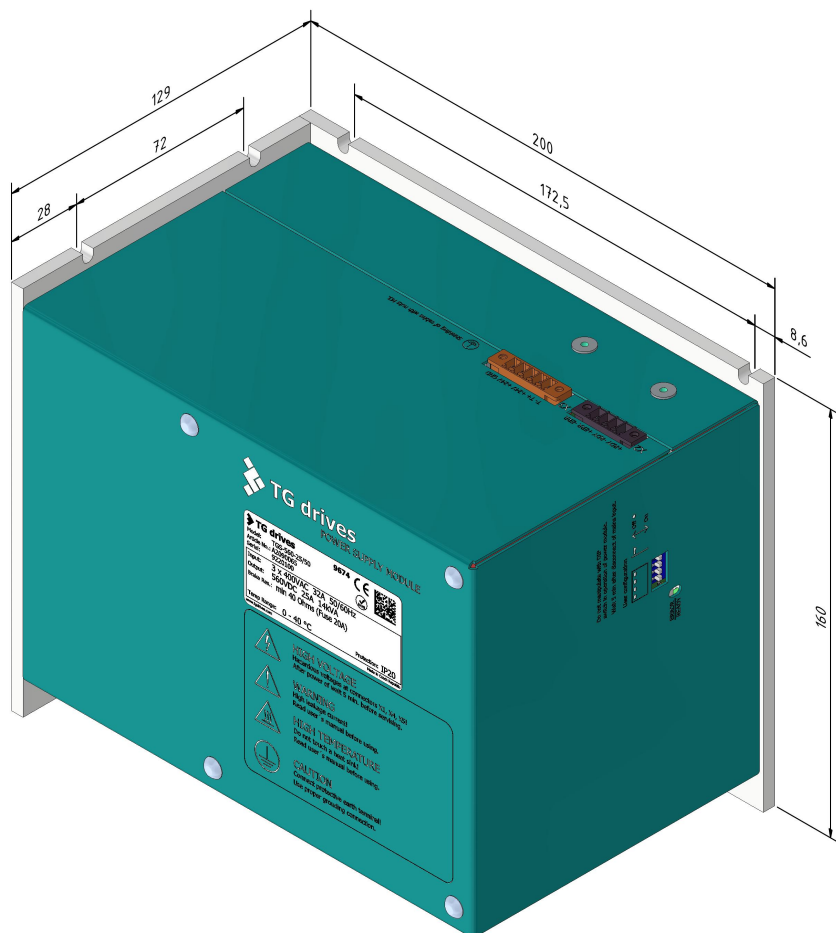

Dimensions with connectors

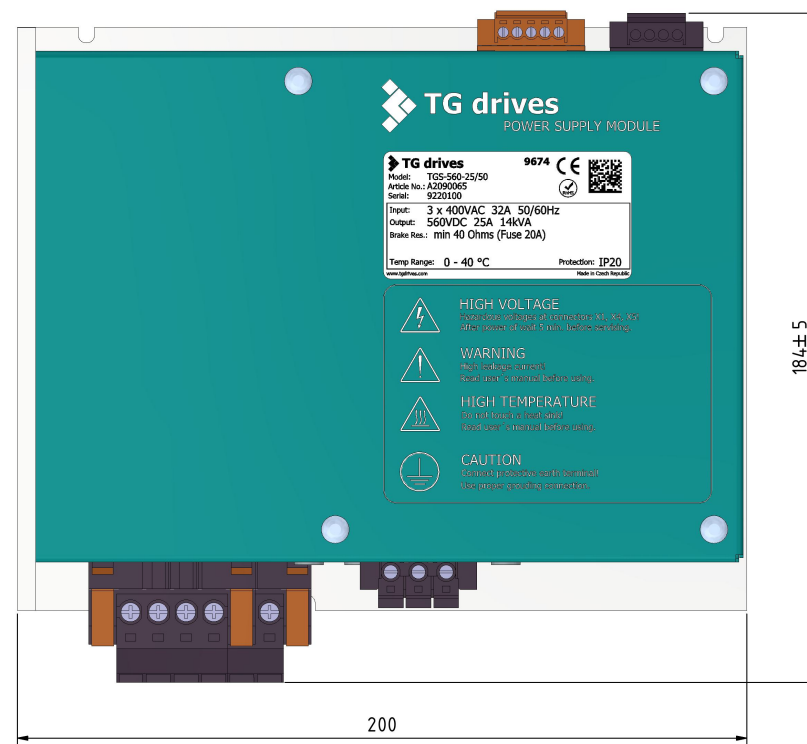

Connectors

