


MNNT LINE

Designed for rapid acceleration or
frequently reversed loads

Up to 1,700 Nm rated

- Satellite gears are double-supported on hardened and ground shafts with full-complement needle bearings for increased torsional stiffness
- Output shaft is supported by 2 angular contact bearings for maximal radial and axial load acceptance
- Backlash from 8 to 1 arc-min max*
- 13 standard reduction ratios from 3 to 100 / custom ratios available
- Easy 1 minute clamping onto any motor shaft - Self-locating input flange
- Standard case temperature range is -20°C to $+90^{\circ}\text{C}$ - Consult us for higher or lower temperature use
- Protection rated IP 65 standard. IP-67 & 1,500 psi water jets available
- Washdown stainless steel version available
- Optional lubricating grease for the food-processing industry
- Easy maintenance

*depending upon ratio and size

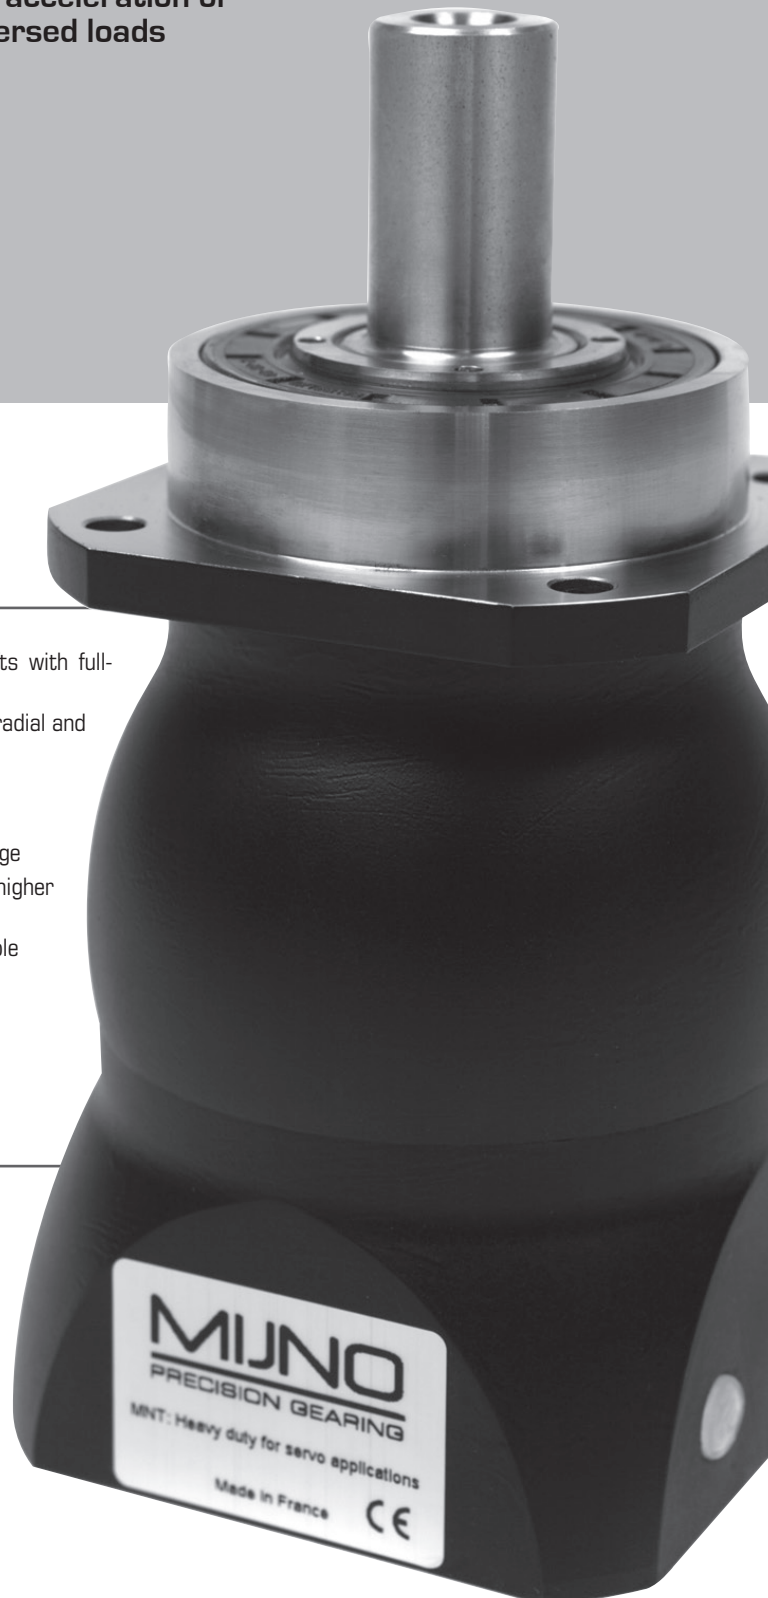

MNT 065


Technical characteristics

Number of stages		1 - Stage					2 - Stages						
Ratio ⁽¹⁾		3	4	5	7	10	16	20	25	35	50	70	100
INPUT													
Rated / max speed	rpm	4 000 / 6 000 (consult us if you require higher input speed)											
Rated power	Kw	2.62	1.96	1.57	1.18	0.75	1.01	0.67	0.53	0.38	0.27	0.16	0.08
Rated torque	Nm	6.85	5.15	4.1	3.1	1.95	2.4	1.59	1.27	0.91	0.64	0.39	0.2
Accel. torque	Nm ⁽²⁾	13.35	10	7.55	5.4	3.25	3.16	2.2	1.76	1.32	0.92	0.63	0.35
OUTPUT													
Rated torque	Nm	19.7	19.7	19.7	20.8	18.7	35	29	29	29	29	25	18
Accel. torque	Nm ⁽²⁾	38	38	36	36	31	46	40	40	42	42	40	32
GENERAL CHARACTERISTICS													
Inertia	Kgm ² x10 ⁻⁵ ⁽³⁾	4.3	3.5	3.27	3.04	2.93	3.2	3	3.16	3	2.9	2.9	2.9
Max. backlash	arc-min.	15 or 5											
Efficiency	% ⁽⁴⁾	96					91						
Expected life time	Hours	20 000											
Weight	Kg	1.7					2.2						
Radial load	N ⁽⁵⁾	1 500											
Axial load	N	1 300											

- ¹⁾ Other ratios are possible, do not hesitate to contact us
²⁾ S5 duty service
³⁾ On the motorside
⁴⁾ Gear efficiency at rated torque
⁵⁾ Load applied in the middle of the output shaft at 300rpm

NOTE : Emergency stop torque is 2.5 times rated output torque for 1000 times max during the life of the gearhead.

Dimensions (mm)

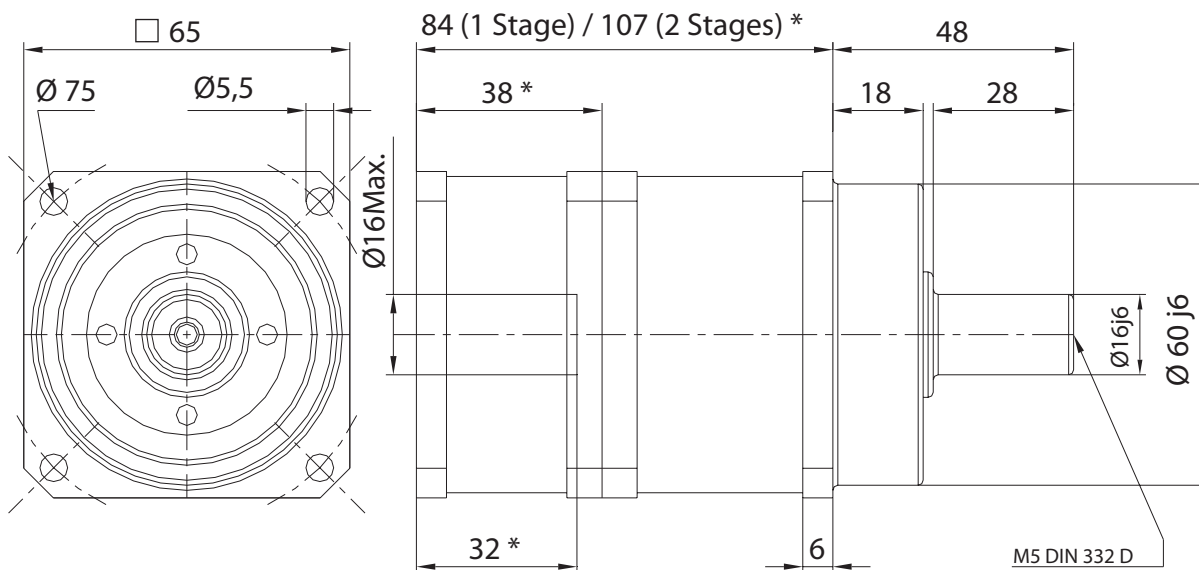

*Depends upon ratio and motor / Product range can be subject to changes without notice
 Download 3D drawings from www.mijno.com

MNT 080


Technical characteristics

Number of stages		1 - Stage					2 - Stages								
Ratio ⁽¹⁾		3	4	5	7	10	16	20	25	35	40	50	70	100	
INPUT															
Rated / max speed	rpm	3 500 / 6 000 (consult us if you require higher input speed)													
Rated power	Kw	12.3	9.2	7.4	4.3	2.2	2.5	1.9	1.6	1.2	0.9	0.8	0.3	0.2	
Rated torque	Nm	29.5	22.1	17.7	10.4	5.2	5.9	4.7	3.7	2.7	2.3	1.8	0.8	0.5	
Accel. torque	Nm ⁽²⁾	38	29	21	15	8	9	7	6	4	3.5	2.8	1.6	0.9	
OUTPUT															
Rated torque	Nm	85	85	85	70	50	86	85	85	86	86	85	50	50	
Accel. torque	Nm ⁽²⁾	110	110	100	100	80	125	126	130	134	126	126	100	80	
GENERAL CHARACTERISTICS															
Inertia	Kgm ² x10 ⁻⁵ ⁽³⁾	13.6	10.86	9.81	9.13	8.73	10.24	10.18	9.48	8.91	8.64	8.63	8.62	8.61	
Max. backlash	arc-min.	10 or 5													
Efficiency	% ⁽⁴⁾	96					91								
Expected life time	Hours							20 000							
Weight	Kg	5					6								
Radial load	N ⁽⁵⁾							3 500							
Axial load	N							3 500							

- ¹⁾ Other ratios are possible, do not hesitate to contact us
²⁾ S5 duty service
³⁾ On the motorside
⁴⁾ Gear efficiency at rated torque
⁵⁾ Load applied in the middle of the output shaft at 300rpm

NOTE : Emergency stop torque is 2.5 times rated output torque for 1000 times max during the life of the gearhead.

Dimensions (mm)

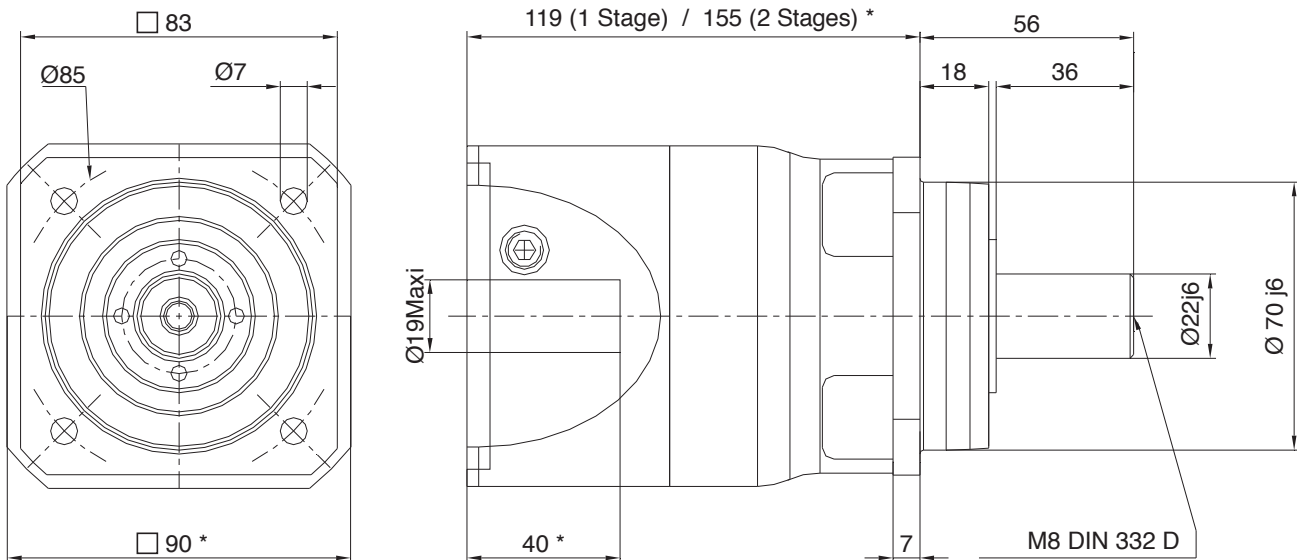

Output view

*Depends upon ratio and motor / Product range can be subject to changes without notice
 Download 3D drawings from www.mijno.com

MNT 115


Technical characteristics

Number of stages		1 - Stage					2 - Stages									
Ratio ⁽¹⁾		3	4	5	7	10	16	20	25	35	40	50	70	100		
INPUT																
Rated / max speed	rpm	3 000 / 6 000 <i>(consult us if you require higher input speed)</i>														
Rated power	Kw	37.7	29.3	20.9	12.5	6.3	8	6.3	5	3.8	2.9	2.5	1.7	0.8		
Rated torque	Nm	90	70	50	30	15	19	15	12	9	7	6	4	2		
Accel. torque	Nm ⁽²⁾	104	81	56	37	21	23	21	17	12	9	8	5	3		
OUTPUT																
Rated torque	Nm	259	270	240	200	144	270	270	270	270	270	270	255	180		
Accel. torque	Nm ⁽²⁾	300	310	270	250	200	340	382	385	390	310	310	320	270		
GENERAL CHARACTERISTICS																
Inertia	Kgm ² x10 ⁻⁵ ⁽³⁾	55.1	44.4	40.4	36.8	35.1	42.3	42	38.9	36	35	34.7	34.5	34.5		
Max. backlash	arc-min.							10 or 5								
Efficiency	% ⁽⁴⁾	96					91									
Expected life time	Hours							20 000								
Weight	Kg	8					10									
Radial load	N ⁽⁵⁾							5 500								
Axial load	N							5 500								

- ¹⁾ Other ratios are possible, do not hesitate to contact us
²⁾ S5 duty service
³⁾ On the motorside
⁴⁾ Gear efficiency at rated torque
⁵⁾ Load applied in the middle of the output shaft at 300rpm

NOTE : Emergency stop torque is 2.5 times rated output torque for 1000 times max during the life of the gearhead.

Dimensions (mm)

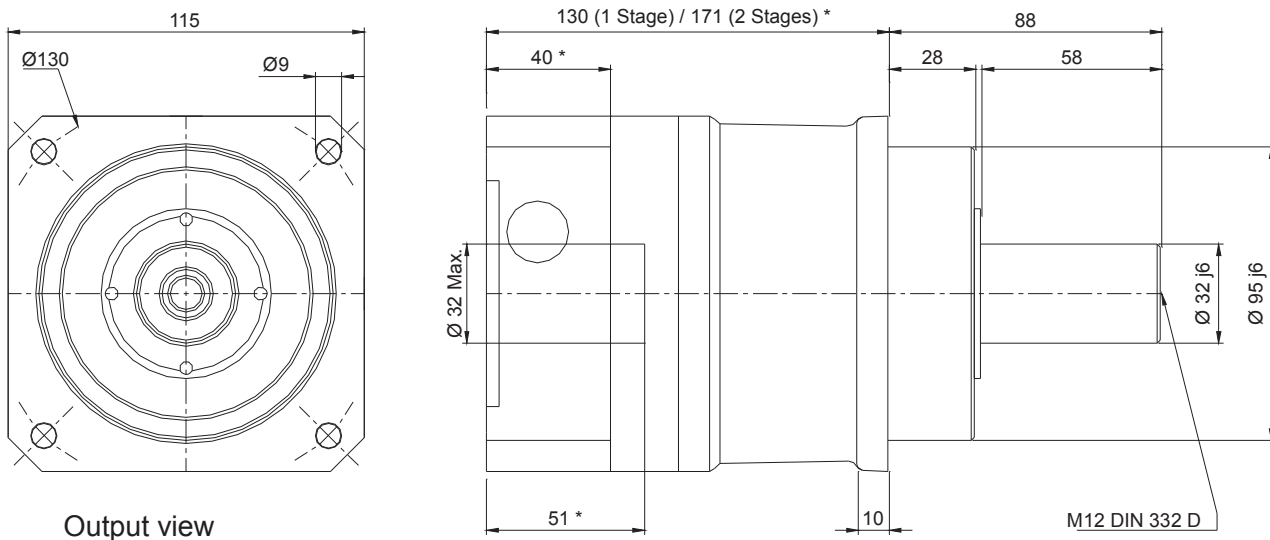

*Depends upon ratio and motor / Product range can be subject to changes without notice
 Download 3D drawings from www.mijno.com

MNT 140

Technical characteristics

Number of stages		1 - Stage					2 - Stages								
Ratio ⁽¹⁾		3	4	5	7	10	16	20	25	35	40	50	70	100	
INPUT															
Rated / max speed	rpm	2 000 / 4 000 (consult us if you require higher input speed)													
Rated power	Kw	52.4	41.9	39.4	23	11.3	12.1	10.5	8.4	5.9	5	4.2	2.5	1.3	
Rated torque	Nm	125	100	94	55	27	29	25	20	14	12	10	6	3	
Accel. torque	Nm ⁽²⁾	173	130	104	74	41	34	31	25	17	15	12	8	4	
OUTPUT															
Rated torque	Nm	360	384	450	369	259	322	450	450	450	450	450	380	273	
Accel. torque	Nm ⁽²⁾	500	500	500	500	400	500	560	560	540	546	550	500	360	
GENERAL CHARACTERISTICS															
Inertia	Kgm ² x10 ⁻⁵ ⁽³⁾	173	128	112	100	94	112	104	102	95	91	91	91	91	
Max. backlash	arc-min.	10 or 5													
Efficiency	% ⁽⁴⁾	96					91								
Expected life time	Hours							20 000							
Weight	Kg	9					17								
Radial load	N ⁽⁵⁾							9 100							
Axial load	N							9 100							

¹⁾ Other ratios are possible, do not hesitate to contact us

²⁾ S5 duty service


³⁾ On the motorside

⁴⁾ Gear efficiency at rated torque

⁵⁾ Load applied in the middle of the output shaft at 300rpm

NOTE : Emergency stop torque is 2.5 times rated output torque for 1000 times max during the life of the gearhead.

Dimensions (mm)

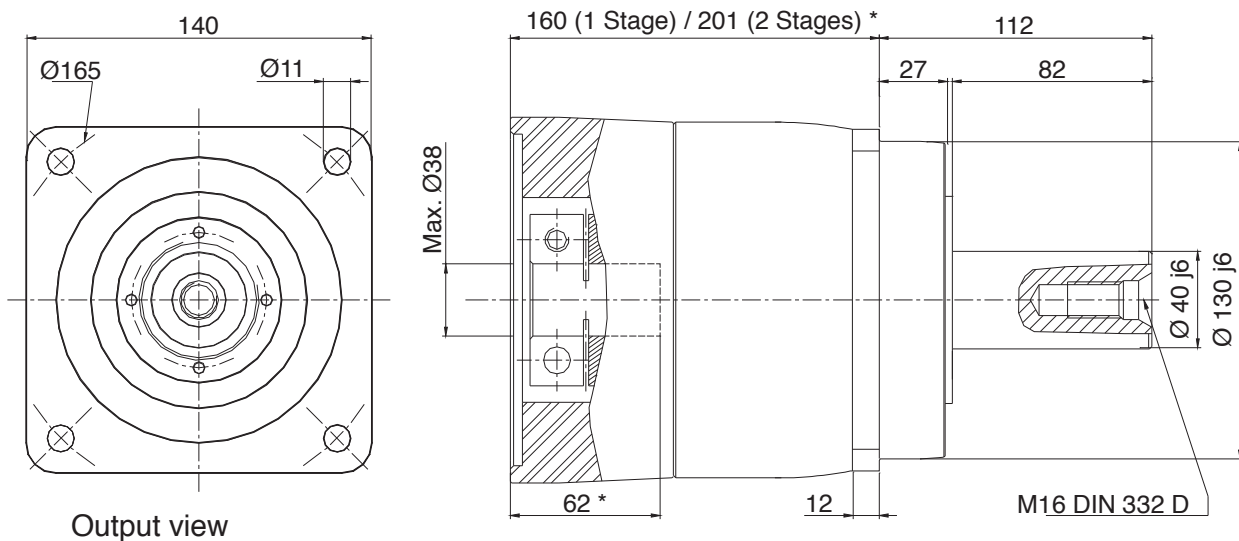

*Depends upon ratio and motor / Product range can be subject to changes without notice

Download 3D drawings from www.mijno.com

Consult us if the solution you are looking for cannot be found in our regular catalog. Our design department can create a custom gearbox most adapted to your needs.

MNT 180


Technical characteristics

Number of stages		1 - Stage					2 - Stages								
Ratio ⁽¹⁾		3	4	5	7	10	16	20	25	35	40	50	70	100	
INPUT															
Rated / max speed	rpm	2 000 / 4 000 (consult us if you require higher input speed)													
Rated power	Kw	79.4	59.9	56.6	34.3	23.9	15.9	15.9	24.4	17.9	6.3	6.3	3.4	2.5	
Rated torque	Nm	190	143	135	82	57	38	38	30	22	15	15	8	6	
Accel. torque	Nm ⁽²⁾	350	260	208	157	83	69	55	44	31	27	22	16	9	
OUTPUT															
Rated torque	Nm	550	700	700	550	550	700	700	700	700	550	550	550	550	
Accel. torque	Nm ⁽²⁾	1 000	1 000	1 000	1 000	800	1 000	1 000	1 000	1 000	1 000	1 000	1 000	1 000	
GENERAL CHARACTERISTICS															
Inertia	Kgm ² x10 ⁻⁵ ⁽³⁾	422	262	207	162	138	226	223	182	148	132	132	132	131	
Max. backlash	arc-min.	6 or 3													
Efficiency	% ⁽⁴⁾	96					91								
Expected life time	Hours								20 000						
Weight	Kg	28					35								
Radial load	N ⁽⁵⁾								14 500						
Axial load	N								14 000						

- ¹⁾ Other ratios are possible, do not hesitate to contact us
²⁾ S5 duty service
³⁾ On the motorside
⁴⁾ Gear efficiency at rated torque
⁵⁾ Load applied in the middle of the output shaft at 300rpm

NOTE : Emergency stop torque is 2.5 times rated output torque for 1000 times max during the life of the gearhead.

Dimensions (mm)

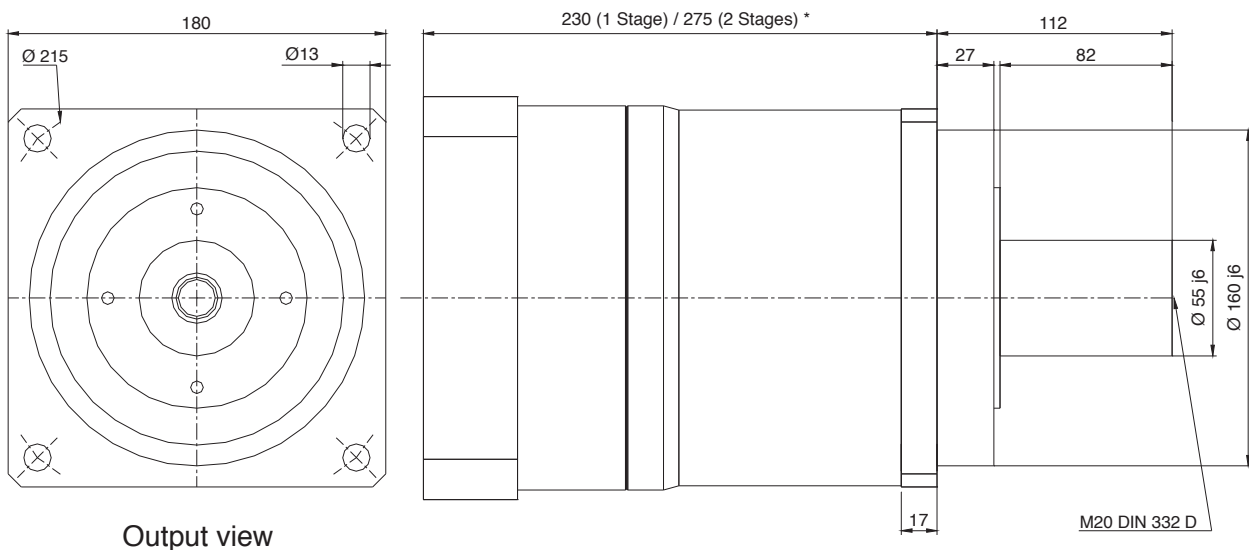

*Depends upon ratio and motor / Product range can be subject to changes without notice
 Download 3D drawings from www.mijno.com

MNT 210


Technical characteristics

Number of stages		1 - Stage					2 - Stages								
Ratio ⁽¹⁾		3	4	5	7	10	16	20	25	35	40	50	70	100	
INPUT															
Rated / max speed	rpm	2 000 / 4 000 (consult us if you require higher input speed)													
Rated power	Kw	145	109	87	62	43	29	23	18	13	11	9	7	4	
Rated torque	Nm	300	230	209	110	87	69	55	44	32	27	22	13	9	
Accel. torque	Nm ⁽²⁾	450	400	300	210	120	130	104	84	47	41	33	23	16	
OUTPUT															
Rated torque	Nm	1 000	1 000	1 000	840	840	1 000	1 000	1 000	1 000	1 000	1 000	740	840	
Accel. torque	Nm ⁽²⁾	1 900	1 900	1 900	1 900	1 500	1 900	1 900	1 900	1 500	1 500	1 500	1 500	1 500	
GENERAL CHARACTERISTICS															
Inertia	Kgm ² x10 ⁻⁵ ⁽³⁾	-	450	343	258	215	235	228	185	150	134	133	132	132	
Max. backlash	arc-min.	6 or 3													
Efficiency	% ⁽⁴⁾	96					91								
Expected life time	Hours							20 000							
Weight	Kg	50					60								
Radial load	N ⁽⁵⁾							18 000							
Axial load	N							18 000							

- ¹⁾ Other ratios are possible, do not hesitate to contact us
²⁾ S5 duty service
³⁾ On the motorside
⁴⁾ Gear efficiency at rated torque
⁵⁾ Load applied in the middle of the output shaft at 300rpm

NOTE : Emergency stop torque is 2.5 times rated output torque for 1000 times max during the life of the gearhead.

Dimensions (mm)

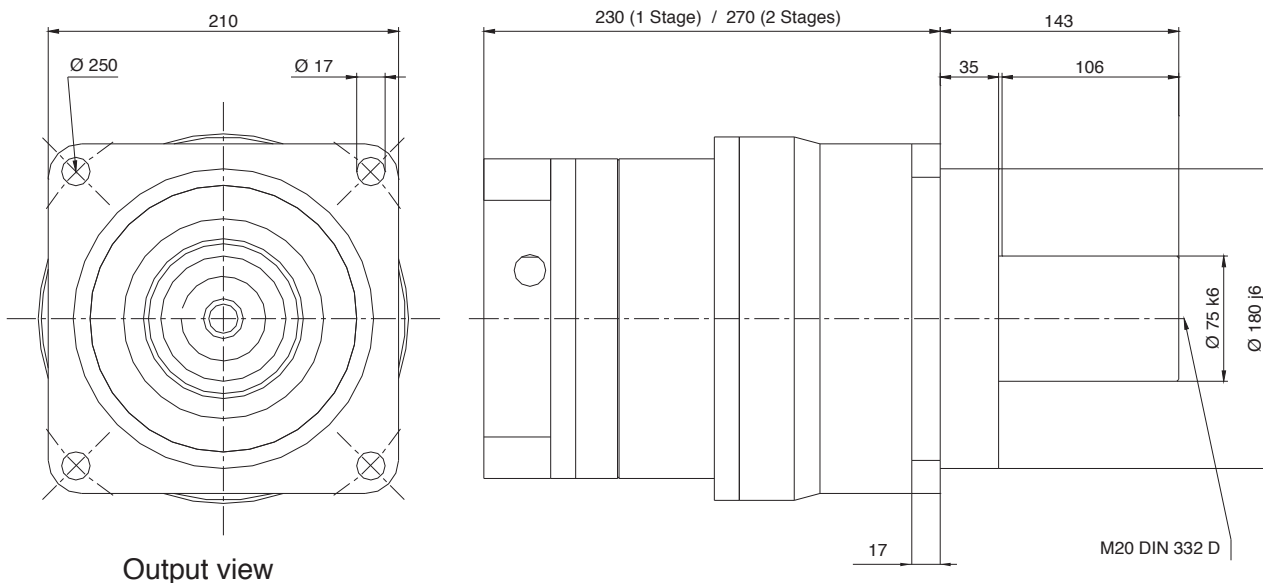

*Depends upon ratio and motor / Product range can be subject to changes without notice
 Download 3D drawings from www.mijno.com

MNT 240


Technical characteristics

Number of stages		1 - Stage					2 - Stages						
Ratio ⁽¹⁾		4	5	7	10	16	20	25	35	40	50	70	100
INPUT													
Rated / max speed	rpm	2 000 / 4 000 (consult us if you require higher input speed)											
Rated power	Kw	109	87	62	43	29	23	18	13	11	9	7	4
Rated torque	Nm	339	271	164	99	117	93	75	50	44	35	25	18
Accel. torque	Nm ⁽²⁾	443	354	238	135	137	110	88	63	55	44	31	22
OUTPUT													
Rated torque	Nm	1300	1300	1100	950	1700	1700	1700	1600	1600	1600	1600	1600
Accel. torque	Nm ⁽²⁾	1700	1700	1600	1300	2000	2000	2000	2000	2000	2000	2000	2000
GENERAL CHARACTERISTICS													
Inertia	Kgm ² x10 ⁻⁵ ⁽³⁾	-											
Max. backlash	arc-min.	6 or 3											
Efficiency	% ⁽⁴⁾	96					91						
Expected life time	Hours	20 000											
Weight	Kg	70					80						
Radial load	N ⁽⁵⁾	22 000											
Axial load	N	22 000											

- ¹⁾ Other ratios are possible, do not hesitate to contact us
²⁾ S5 duty service
³⁾ On the motorside
⁴⁾ Gear efficiency at rated torque
⁵⁾ Load applied in the middle of the output shaft at 300rpm

NOTE : Emergency stop torque is 2.5 times rated output torque for 1000 times max during the life of the gearhead.

Dimensions (mm)

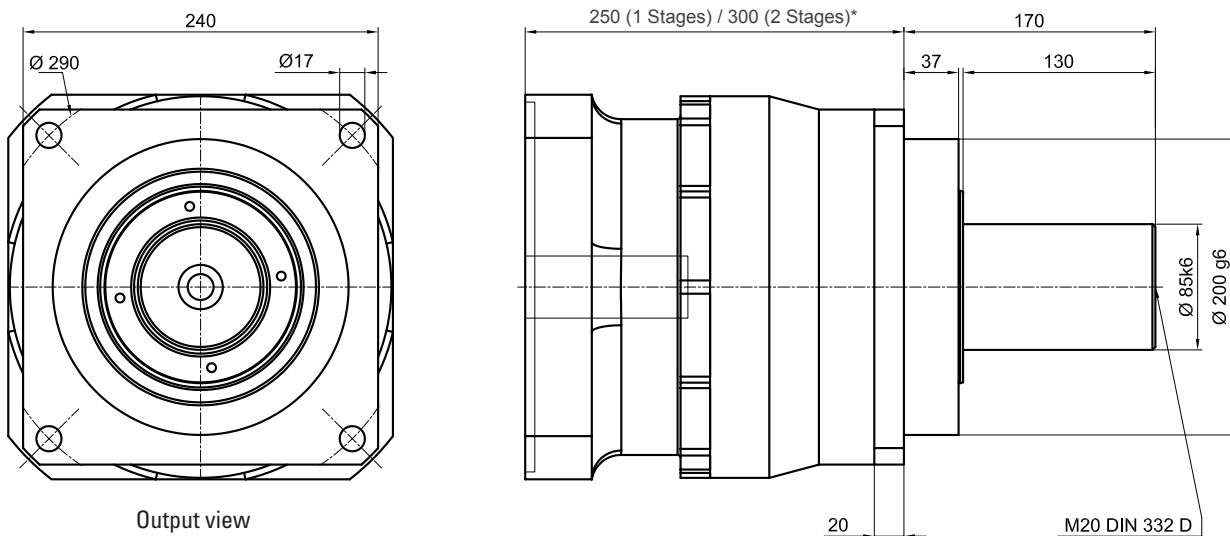

*Depends upon ratio and motor / Product range can be subject to changes without notice
 Download 3D drawings from www.mijno.com