Engineering motordata (WIN 586)		
DC bus voltage	48	V DC
Nominal AC voltage	30	V AC (rms)
Rated voltage	22	V AC (rms)
Rated power	113	W
Rated speed	4500	rpm
Rated torque	0.24	Nm
Rated current	4.46	A (rms)
Peak torque	1	Nm
Peak current	18.8	A (rms)
Stall torque	0.26	Nm
Stall current	4.56	A (rms)
No load speed	8590	rpm
EMF constant ±10%	3.5	V AC (rms) / 1000rpm
Theoretical torque constant ±10%	0.06	Nm / A (rms)
Torque constant ±10% @ rated load	0.05	Nm / A (rms)
Number of poles	6	
Electrical time constant	1.61	ms
Winding terminal resistance	0.88	Ω
Rotary field terminal inductance	1.42	mH

Customs info	
HS Code	85015100

Mechanical motor data (setting 48)		
Max mechanical speed	12000	rpm
Mech. time constant	2.73	ms
Thermal time constant	13	min
Rotor inertia	0.06	kgcm²
Protection	IP65	
Color	RAL 9005	
Cooling	Convection	

Sensors	
Temperature	PT1000 {PT1000}
Feedback	EDM35 (HDSL) multi-turn, 20+12 bits

Brake		
Braking torque	0.40	Nm
Voltage	24	V DC
Power @20°C	8.0	W
Current @20°C	0.33	A
Inertia	0.02	kgcm²
Mass	0.10	kg


Gearbox engineering data		
Gear ratio	63	
Efficiency*	95	%
Torsional stiffness	2.5	Nm/arcmin
Rated output torque	18	Nm
Max output torque	36	Nm
Emergency output torque	90	Nm
Rated input speed	2000	rpm
Max input speed	5000	rpm
Operating temperature	<-25; 50>	°C
Max. backlash	< 1.5	arcmin
Service life	6000	h


** at rated speed & torque*

Lubrication	
Type	Standard
Lubricant	TRIBOL GR TT 1 PD


Gearbox mechanical data		
Max. radial force	1440	N
Max. axial force	1900	N
Output shaft design	Flange	
Mass	0.47	kg
Input inertia	0.007	kgcm²
Protection	IP64	

Actuator data		
Rated speed	32	rpm
Rated torque	15.03	Nm
Peak torque	36.00	Nm
Emergency stop torque	63.00	Nm
EMF constant ±10%	220.5	V AC (rms) / 1000rpm
Torque constant ±10% @ rated load	3.22	Nm / A (rms)
Output inertia	265.9	kgcm²

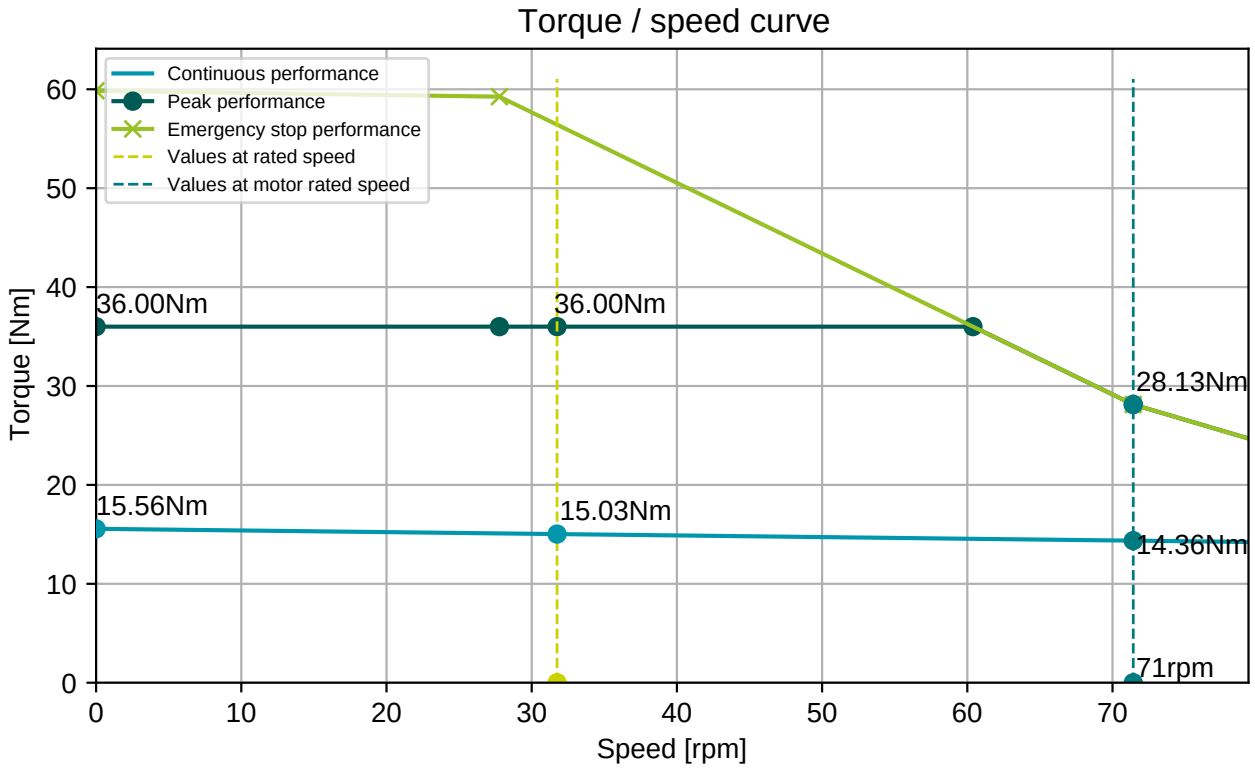

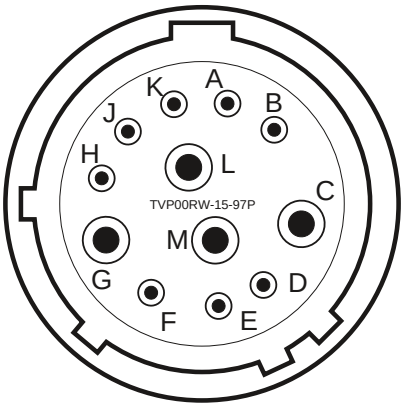

Connector 1 (541)	
A	Brake+
B	Brake-
C	Motor U
G	PE
J	+Us/DSL+
K	GND/DSL-
L	Motor W
M	Motor V

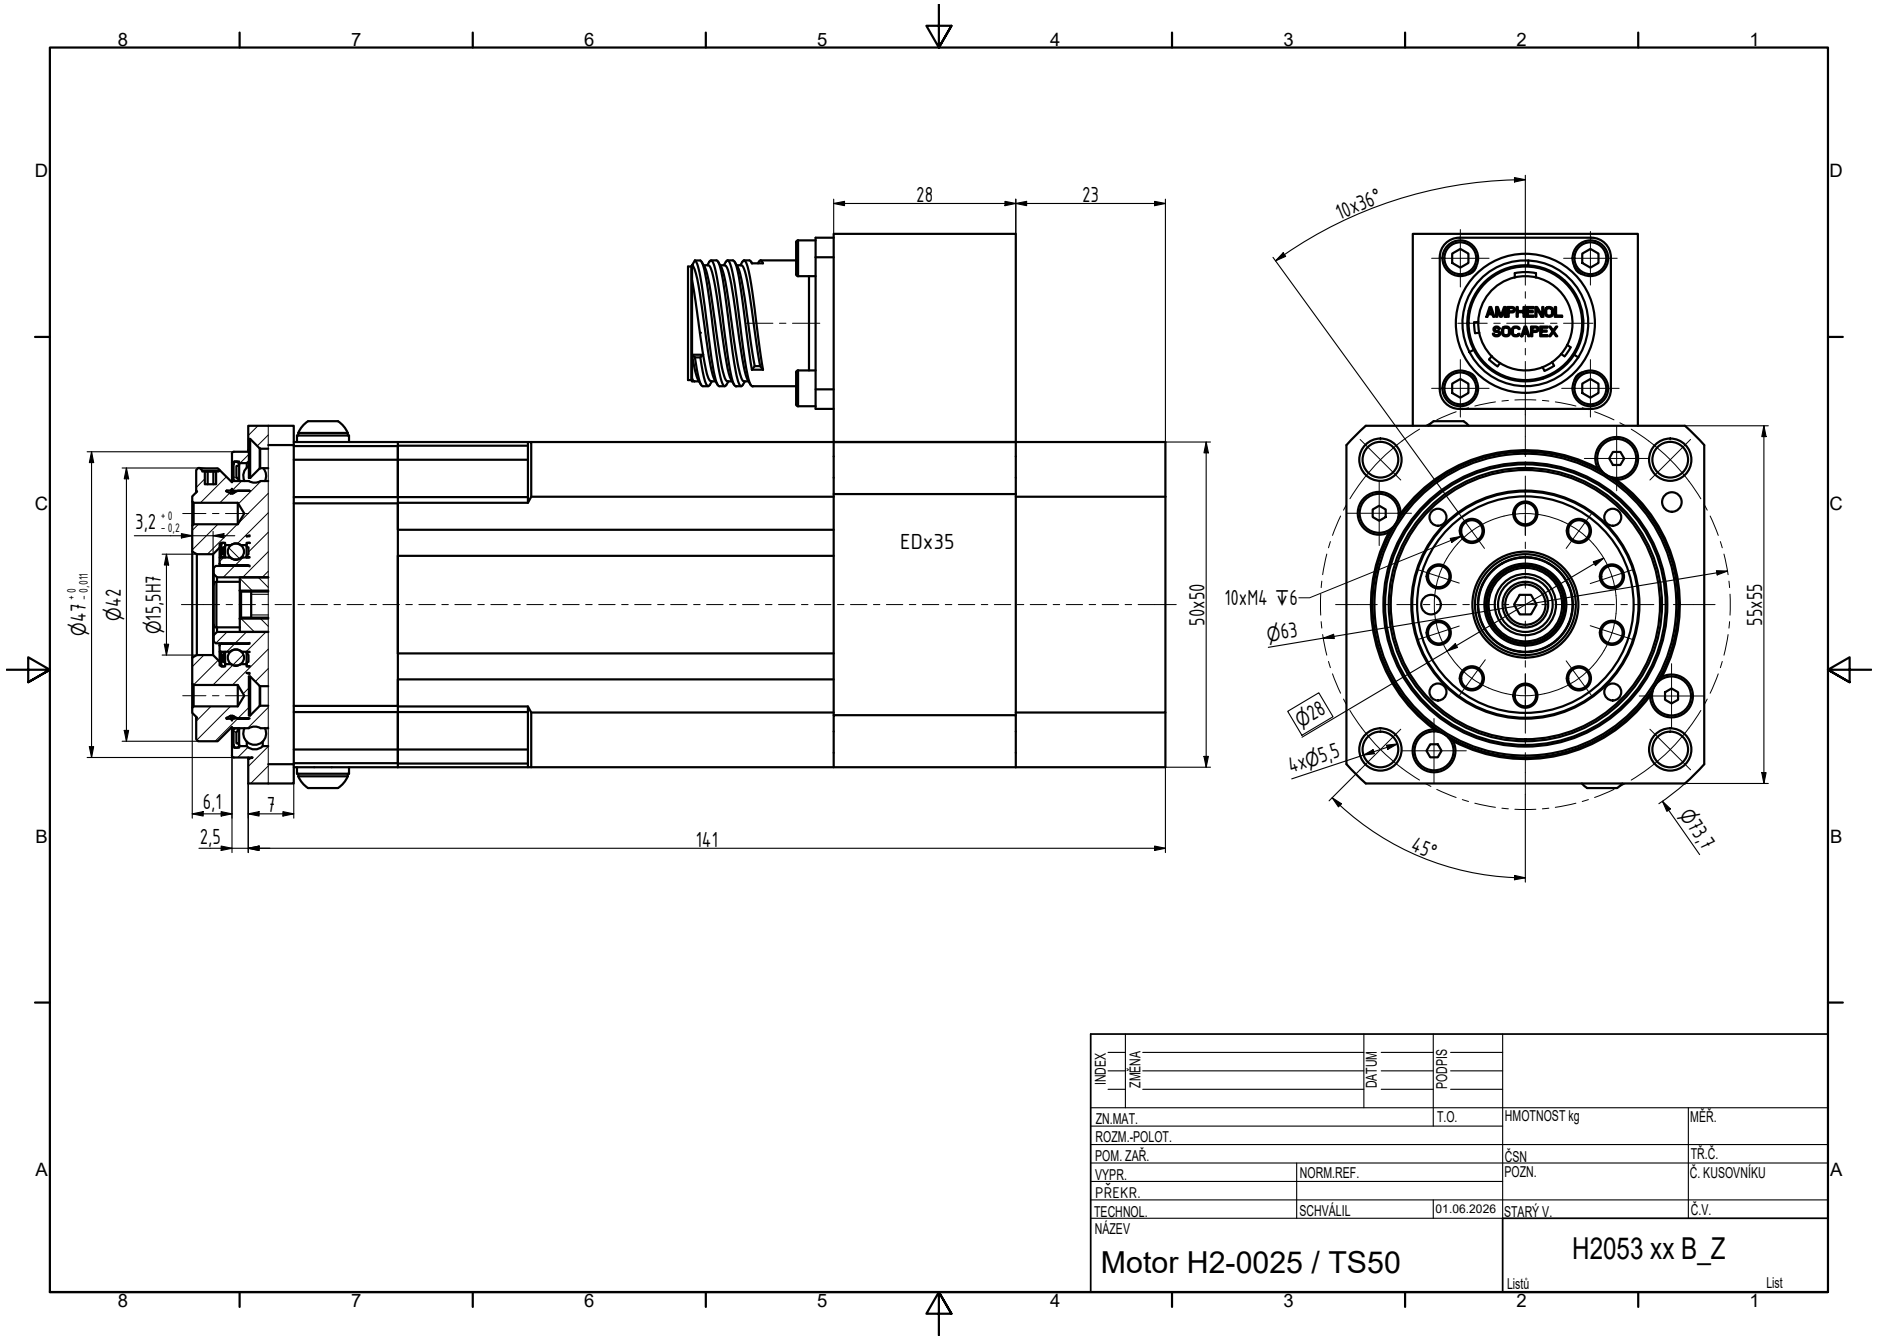

INDEX	ZMĚNA	DATUM	PODPIS

ZN.MAT.			T.O.	HMOTNOST kg	MĚŘ.
ROZM.-POLOT.					
POM. ZAŘ.				ČSN	TŘ.Č.
VYPR.		NORM.REF.		POZN.	Č. KUSOVNÍKU
PŘEKR.					
TECHNOL.		SCHVÁLIL	01.06.2026	STARÝ V.	Č.V.

NÁZEV

Motor H2-0025 / TS50

H2053 xx B_Z

Listů List